

Ballast for vertical panels 10° - 15°


- cod. FVD500013 - cod. FVD500014



DESCRIPTION

Vibrated and reinforced concrete ballast with integrated FVP 200 aluminium profile. Ideal for vertically installed photovoltaic and solar thermal panels up to 2.4 m long.

DIMENSIONS

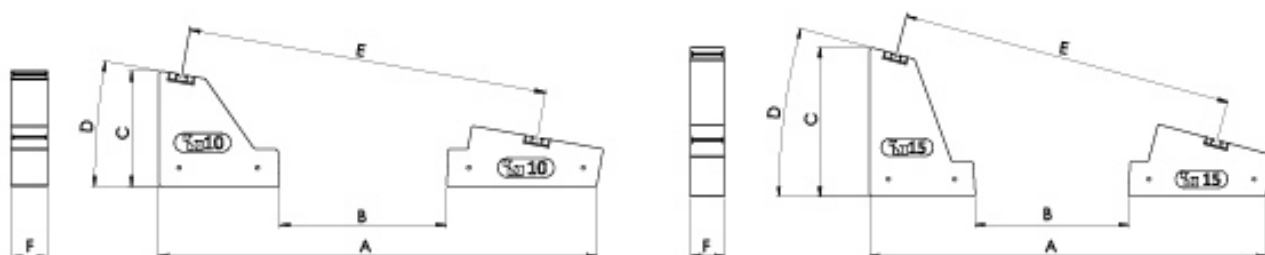

CODE	A [mm]	B [mm]	C [mm]	D [°]	E [mm]	F [mm]	WEIGHT [kg]	PANNEL max [mm]
FVD500013	1397	533	365	10	1152	115	45	2400
FVD500014	1374	532	515	15	1152	115	56	2400

ITEMS

CODE	DESCRIPTION
FVD500013	
FVD500014	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA. Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.