

SMART FLOW - SF 20 - 30 - 40 It

condensate collection pump



- cod. 12170105 - cod. 12170106 - cod. 12170107



TECHNICAL SPECIFICATIONS:

- Power supply 230V - 50Hz
- Alarm contact C-NO 6A
- Protection rating IP X7
- Connection pipe \varnothing internal 4 mm, external \varnothing 6 mm
- Pump dimensions 143 x 76 x 62.3 mm

PACK COMPLETE WITH


- 1 pump body
- 1 sheet of instructions

COMBINATIONS WITH CONDENSATE DRAIN PIPES:

Connection hose for SMART FLOW-SF pump 20 \varnothing 4 x 6 mm

Connection hose for SMART FLOW-SF pump 30-40 \varnothing 6 x 9.25 mm


SMART FLOW - SF 20 It

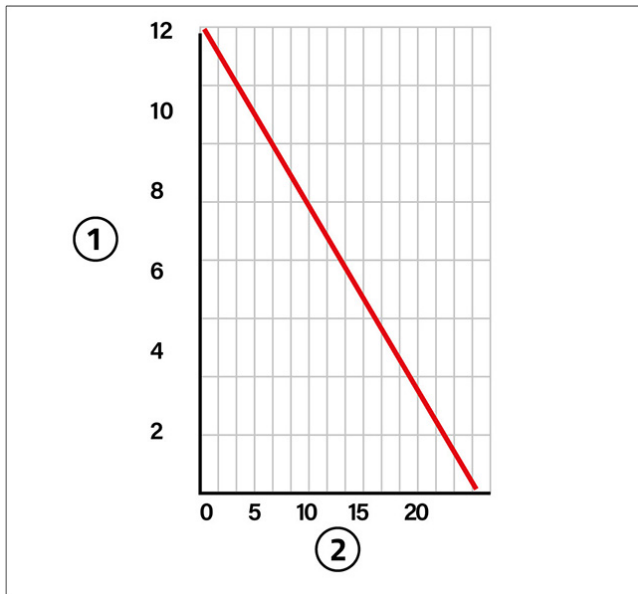

[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

- Flow rate 20 l/h for unit up to 20 kW
- Max. 12 m vertical delivery
- Power consumption 19 W
- Max. noise level 29 [dB (A)]
- Pipe dimensions \varnothing 4 x 6 mm


SMART FLOW - SF 30 It

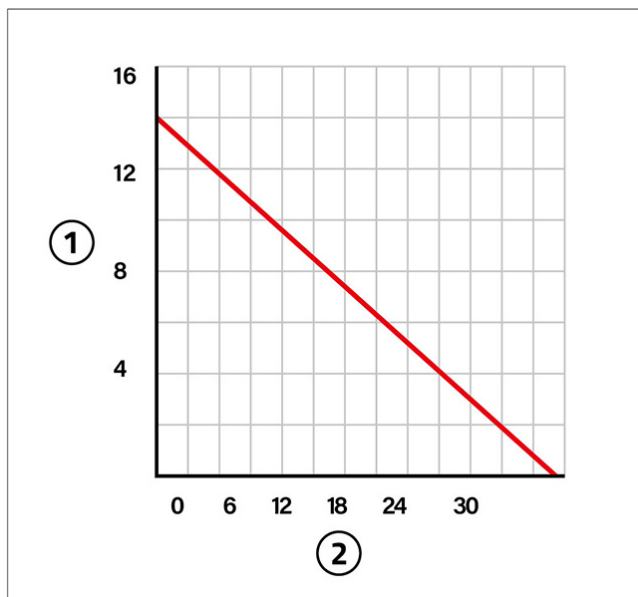

[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

- Flow rate 30 l/h for unit up to 30 kW
- Max. 14 m vertical delivery
- Power consumption 25 W
- Max noise level 50 [dB(A)]
- Pipe dimensions \varnothing 6 x 9,5 mm

SMART FLOW - SF 40 lt

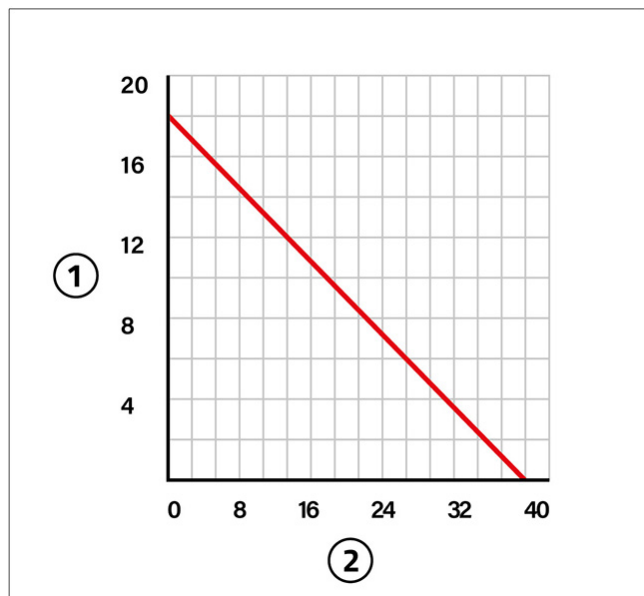

[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

- Flow rate 40 l/h for unit up to 40 kW
- Max. 18 m vertical delivery
- Power consumption 27 W
- Max noise level 53 [dB(A)]
- Pipe dimensions \varnothing 6 x 9,5 mm

ASSEMBLY APPLICATIONS

- column air conditioners
- refrigerated cabinets
- refrigerated cabinets
- fridge counters
- evaporators
- ceiling-mounted air conditioners

ITEMS

CODE	DESCRIPTION
12170105	SMART FLOW-SF 20 LT. CONDENSATE COLLECTION PUMP
12170106	SMART FLOW-SF 30 LT. CONDENSATE COLLECTION PUMP
12170107	SMART FLOW-SF 40 LT. CONDENSATE COLLECTION PUMP

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.