



Insulated, multi-intake plenum for linear diffuser 2/3 slots

- cod. PWD400386 - cod. PWD400387 - cod. PWD400388
- cod. PWD400389

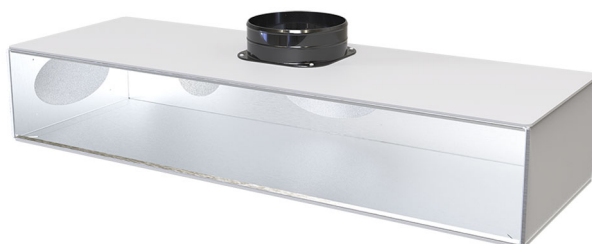

TECHNICAL SPECIFICATIONS:

- Made of insulated galvanised sheet metal
- Outer closed cell polyethylene coating (thickness 3 mm)
- Collars for upper coupling supplied
- Collars for rear and side inlets available on request (see combinations in table)
- Pre-cut holes for MVHR
- Connectors for flexible CMV hose $\varnothing 92$ / $\varnothing 75$ on request
- Diffuser fastening brackets and hardware kit supplied

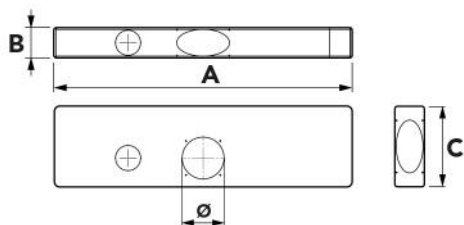

DIMENSIONS

CODE	DIMENSIONS A [mm]	DIMENSIONS B [mm]	DIMENSIONS C [mm]	NO. OF UPPER COLLARS SUPPLIED / MOD.	BACK COLLAR ON REQUEST / MOD.	SIDE COLLAR ON REQUEST / MOD.	NO. OF COMPATIBLE DIFFUSER SLOTS
PWD400386	630	105	280	1 pc. / E5 (Ø150)	1 pc. / C3 (OVAL Ø150-125)		2
PWD400387	830	105	280	1 pc. / E5 (Ø150)	1 pc. / C3 (OVAL Ø150-125)		2
PWD400388	1030	105	280	1 pc. / E5 (Ø150)	1 pc. / C3 (OVAL Ø150-125)		2
PWD400389	1530	145	280	1 pc. / E5 (Ø150)	1 pc. / C3 (OVAL Ø150-125)		3

ITEMS

CODE	DESCRIPTION
PWD400386	
PWD400387	
PWD400388	
PWD400389	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.