


PAL reduction

- cod. PWD600013 - cod. PWD600014 - cod. PWD600015
- cod. PWD600016 - cod. PWD600017



TECHNICAL SPECIFICATIONS PAL:

- Coated on both sides with embossed aluminium with thickness: 80 μ m
- Aluminium flange supplied
- Material thickness 20 mm
- Density: 49 kg/m³
- Reaction to fire class: B-s3,d0
- Temperature: -30°C to +80°C

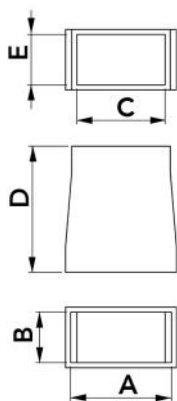

DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
PWD600013	350	200	200	500	--
PWD600014	400	200	350	500	--
PWD600015	500	250	400	500	200
PWD600016	250	500	500	500	250
PWD600017	600	300	550	500	--

ITEMS

CODE	DESCRIPTION
PWD600013	REDUCTION IN PAL 350x200 A 200x200
PWD600014	REDUCTION IN PAL 400x200 A 350x200
PWD600015	REDUCTION IN PAL 500x250 A 400x200
PWD600016	REDUCTION IN PAL 550x300 A 500x250
PWD600017	REDUCTION IN PAL 600x300 A 550x300

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.