


# "Y" shunt in PAL

- cod. PWD600018 - cod. PWD600019 - cod. PWD600020



## TECHNICAL SPECIFICATIONS PAL:

- Coated on both sides with embossed aluminium with thickness: 80  $\mu$ m
- Aluminium flange supplied
- Material thickness 20 mm
- Density: 49 kg/m<sup>3</sup>
- Reaction to fire class: B-s3,d0
- Temperature: -30°C to +80°C

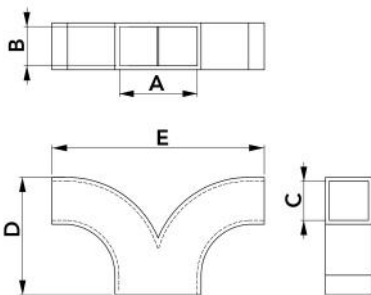

## DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
PWD600018	350	200	200	600	1000
PWD600019	400	200	200	600	1100
PWD600020	600	300	300	900	1300

## ITEMS

CODE	DESCRIPTION
PWD600018	"Y" BRANCH IN PAL 350x200 A 200x200
PWD600019	"Y" BRANCH IN PAL 400x200 A 200x200
PWD600020	"Y" BRANCH IN PAL 600x300 A 550x300

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.