


# Delivery / return plenum with made-to-measure reduced window coupler in aluminate pole for duct systems

- cod. 11161605F - cod. 11161606F - cod. 11161607F  
 - cod. PWD400114

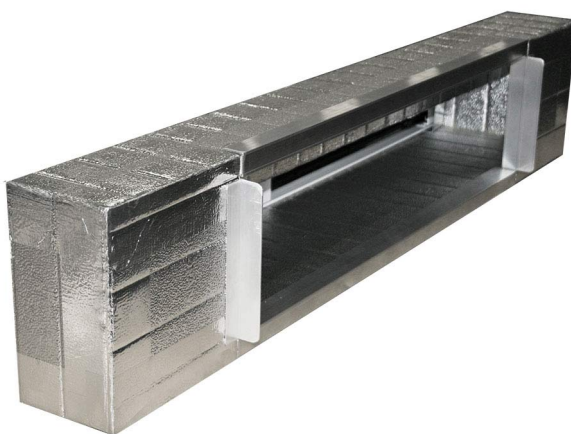


## TECHNICAL SPECIFICATIONS:

- Made of high quality 80  $\mu$  aluminium foil, embossed and lacquered, insulated with stiff expanded polyisocyanurate (PIR) foam
- Overall thickness 20 mm fire-retardant, highly heat-insulating, waterproof
- Includes fastening flange

## DIMENSIONS

- Provide dimensions of delivery outlet (A1 x B1 mm, C 260 mm fixed) of indoor unit
- Provide outer plenum dimensions (A x B mm, C 300 mm fixed)



A = a + 40 mm  
 B = b + 40 mm  
 C = c + 40 mm  
 C = c1 + 20 mm

CODE	MODEL	INTERNAL HEIGHT A [mm]	INTERNAL WIDTH B [mm]	INTERNAL DEPTH c [mm]
11161605F	mod. 1/F	on request up to 300	on request up to 1000	260 FISSA
11161606F	mod. 2/F	on request up to 400	on request up to 1200	260 FISSA
11161607F	mod. 3/F	on request up to 400	on request up to 1500	260 FISSA
PWD400114	mod. 4/F	on request up to 500	on request up to 1700	260 FISSA

## ITEMS

CODE	DESCRIPTION
11161605F	SUPPLY/RETURN PLENUM WITH REDUCED WINDOW COUPLING FOR PAL ALUMINIUM CUSTOMIZED DUCTS MOD.1/F
11161606F	SUPPLY/RETURN PLENUM WITH REDUCED WINDOW COUPLING FOR PAL ALUMINIUM CUSTOMIZED DUCTS MOD.2/F
11161607F	SUPPLY/RETURN PLENUM WITH REDUCED WINDOW COUPLING FOR PAL ALUMINIUM CUSTOMIZED DUCTS MOD.3/F
PWD400114	SUPPLY/RETURN PLENUM WITH REDUCED WINDOW COUPLING FOR PAL ALUMINIUM CUSTOMIZED DUCTS MOD.7/F

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.