


# HSTL 105/20-62

HSTL 120 / 40-62 support for fixing on pitched roofs

- cod. 11110708 - cod. 11110708BOX - cod. 11110708Z
- cod. 11110708ZBOX

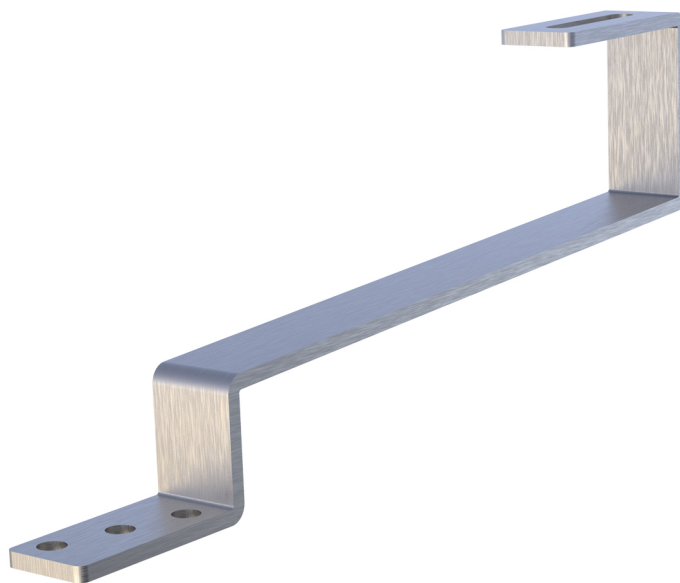

## TECHNICAL SPECIFICATIONS:

- Material: AISI 304 stainless steel
- Flexural modulus of elasticity: 196000 N/mm<sup>2</sup>
- Tensile breaking load: 515 N/mm<sup>2</sup>
- Hook dimensions: 30mm x 5mm thickness
- No. 3 ø9 holes prepared for plate fixing

## TECHNICAL SPECIFICATIONS:

- Material: galvanised steel
- Tensile strength: 440 N/mm<sup>2</sup>
- Treatment: hot dip galvanised
- Hook dimensions: 30mm x 5mm thickness
- 3 holes ø 9 prepared for plate fixing

## STAINLESS STEEL CODE

CODE	DESCRIPTION
11110708	SUPPORT FOR FIXING ON ROOFS HSTL 105/20-62 INOX AISI 304
11110708BOX	SUPPORT FOR FIXING ON ROOFS HSTL 105/20-62 INOX AISI 304 - BOX 10 pcs

## GALVANISED STEEL CODE

CODE	DESCRIPTION
11110708Z	SUPPORT FOR FIXING ON ROOFS HSTL 105/20-62 ZINCATO
11110708ZBOX	SUPPORT FOR FIXING ON ROOFS HSTL 105/20-62 GALVANIZED- BOX 10 pcs

All rights relating to this publication are the exclusive property of Tecnosystemi SpA. Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.