


HSTL 127/47-66

HSTL 120 / 40-62 support for fixing on pitched roofs

- cod. 11110710 - cod. 11110710BOX - cod. 11110710Z
- cod. 11110710ZBOX

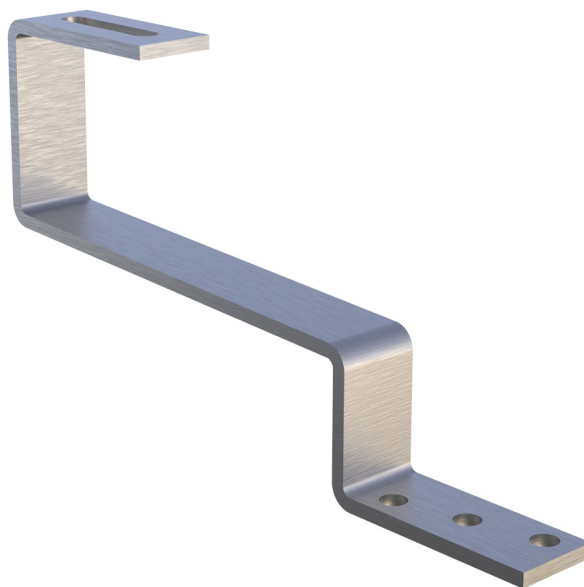

TECHNICAL SPECIFICATIONS:

- Material: AISI 304 stainless steel
- Flexural modulus of elasticity: 196000 N/mm²
- Tensile breaking load: 515 N/mm²
- Thickness 5 mm
- 3 holes Ø 11 prepared for roof fixing

TECHNICAL SPECIFICATIONS:

- Material: galvanised steel
- Tensile strength: 440 N/mm²
- Treatment: hot dip galvanised
- Hook dimensions: 30mm x 5mm thickness
- 3 holes Ø 9 prepared for plate fixing

STAINLESS STEEL CODE

CODE	DESCRIPTION
11110710	SUPPORT FOR FIXING ON ROOFS HSTL 127/47-66 INOX AISI 304
11110710BOX	SUPPORT FOR FIXING ON ROOFS HSTL 127/47-66 INOX AISI 304 - BOX 10 pcs

GALVANISED STEEL CODE

CODE	DESCRIPTION
11110710Z	SUPPORT FOR FIXING ON ROOFS HSTL 127/47-66 ZINCATO
11110710ZBOX	SUPPORT FOR FIXING ON ROOFS HSTL 127/47-66-BOX 10 pcs (ZINCATO)

All rights relating to this publication are the exclusive property of Tecnosystemi SpA. Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.