


# FSTR

support with triple adjustment for fixing on roofs with roof tiles and tiles



- cod. 11110766 - cod. 11110766BOX

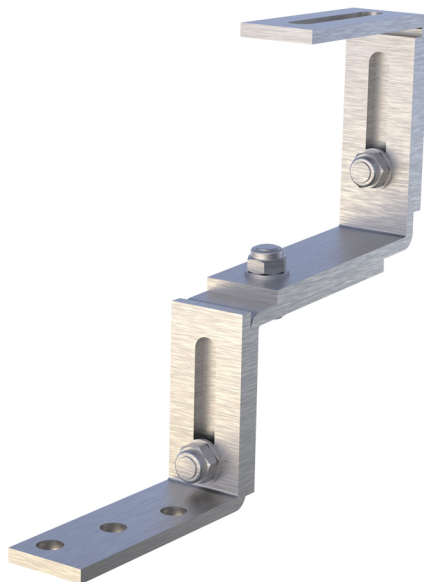

## TECHNICAL SPECIFICATIONS:

- Material: AISI 304 stainless steel
- Thickness 5 mm
- Flexural modulus of elasticity: 196000 N/mm<sup>2</sup>
- Tensile breaking load: 515 N/mm<sup>2</sup>

## TECHNICAL DRAWING:

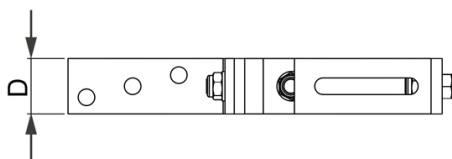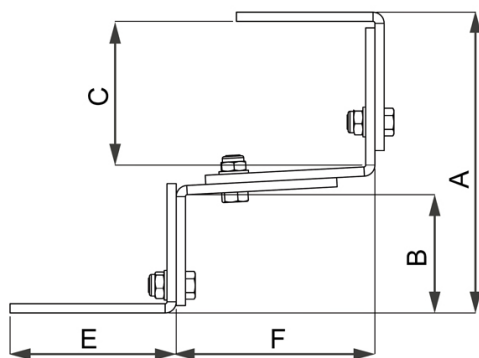


## FULL SIZED:

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]
11110766	225 ± 170	100 ± 65	135 ± 95	30	90	100	30
11110766BOX	225 ± 170	100 ± 65	135 ± 95	30	90	100	30

## APPLICATION:

Fixing of photovoltaic systems on roofing tiles supported by strips of varying thickness.

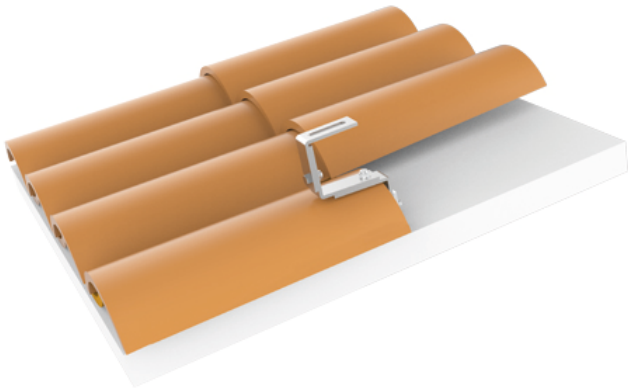

## ITEMS

CODE	DESCRIPTION
11110766	INOX AISI 304 ADJUSTABLE SUPPORT FOR FIXING INTO ROOFS MOD. FSTR
11110766BOX	INOX AISI 304 ADJUSTABLE SUPPORT FOR FIXING INTO ROOFS MOD. FSTR - BOX 10 PCS

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.