

# DATASHEET

rev. 00 - 16/09/2022

## OPTIMA TB

duct with level

B-11130062 - B-11130075 - B-11130100




### TECHNICAL SPECIFICATIONS:

- Stiff, shockproof, anti-UVA PVC, white, recyclable
- Sharp-edged bottom
- Pre-punched slots for wall mounting
- Four-way sliding spirit level supplied on each 2m bar
- Prepared for insertion of the mini pumps Easy Flow, Easy One, Aqua Split (only model TB 75-OPT)
- Central closure with patented accidental anti-release
- Rounded cover
- Bar length 2 m
- Paintable
- Operating temperature -20°C / +60°C


### MODELS AVAILABLE:



WHITE RAL 9010

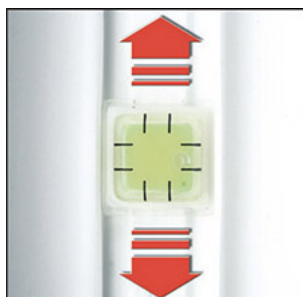

Vertikale duct

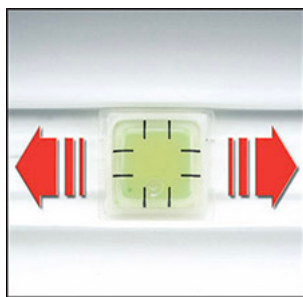


Horizontal duct



Duct installation without built-in level



Duct installat

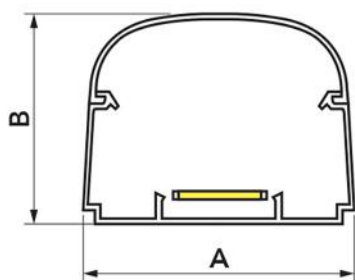

## DIMENSIONS

CODE	MODEL	A [mm]	B [mm]
B-11130062	TB 62 - OPT	62	46
B-11130075	TB 75 - OPT	74	56
B-11130100	TB 102 - OPT	100	66

## ITEMS

CODE	DESCRIPTION
B-11130062	TB62 -OPT - "OPTIMA TB" TB62 TRUNKING WITH SPIRIT LEVEL - 2 mt. long
B-11130075	TB75 -OPT - "OPTIMA TB" TB75 TRUNKING WITH SPIRIT LEVEL - 2 mt. long
B-11130100	TB102 -OPT - "OPTIMA TB" TB102 TRUNKING WITH SPIRIT LEVEL - 2 mt. long