

MINI DISCOVERY 3X

wall-mounted backlit programmable thermostat with touch, battery-run radio frequency

GAD100008




TECHNICAL SPECIFICATIONS:

- Power supply battery 2 x 1.5 V type AAA (LR03) supplied
- Battery life 18 months (normal use)
- 868 MHz RF radio frequency data transmission
- RF signal range 50 m maximum in open field between chronothermostat and "Polaris" control unit
- 2.4" backlit LCD display
- White background touch display with black numbers

FUNCTIONS

- Backlight 5 sec.
 - Timed or manual features (*)
 - Automatic or manual adjustment of damper and nozzle
 - Timed thermostat lock
 - Temperature scale °C/°F (*)
 - AT and set point value
 - Ready for window contact
 - Clock (AM - PM / 24h) (*)
 - Daily and weekly feature
 - Wall mounted using template, screws and fixing plugs supplied
- (*) Time slots can be set by the "Polaris" control unit, by the "Proair Multi-Zone" app or by the Chronothermostat Master

DIMENSIONS

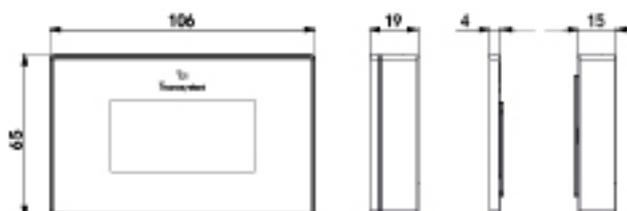


FIXING

Wall-mounting using supplied template, screws and fixing plugs


The programmable thermostat is fastened to the wall very quickly.

The programmable thermostat can be attached to / detached from the wall at any time with a slight external pressure by means of a coupling template supplied.

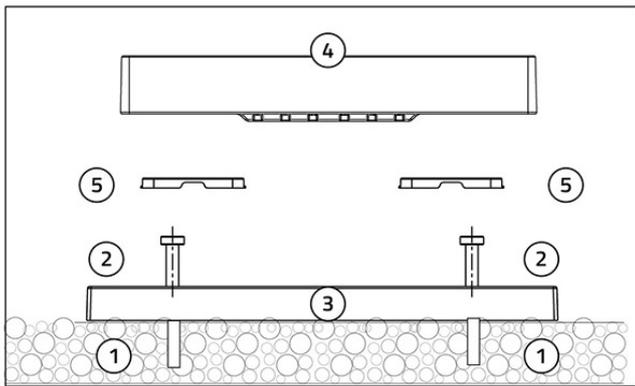

- [1] Dowel
- [2] Screw
- [3] Fastening template
- [4] Timed thermostat
- [5] Cap

BATTERY REPLACEMENT

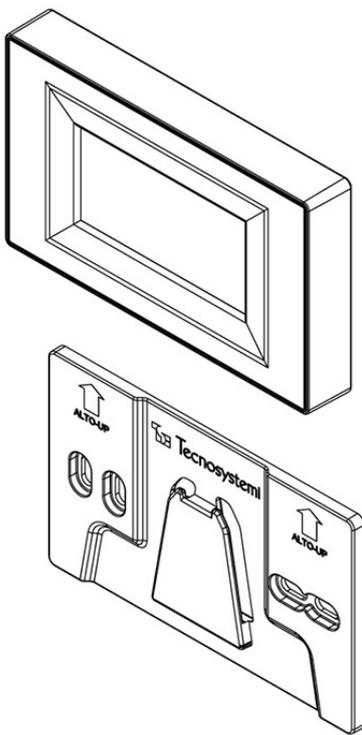

Battery life 18/24 months (normal use)
 The chronothermostats are powered by No. 2 AAA type 1.5 V batteries

Remove the chrono-thermostat from the template for wall mounting by sliding it upward.

ITEMS

CODE	DESCRIPTION
GAD100008	