


PROAIR MULTI-ZONE

motorised circular damper / motorised circular by-pass for system

11181510 - 11181520 - 11181530
11181540



TECHNICAL SPECIFICATIONS:

- Removable motor that can be positioned at: 0° - 90° - 180° 270° - 360°
- Made of anti-condensation plastic
- Ensures thermal insulation between the inner and outer surfaces

FUNCTIONS


- Communicates directly with the system control unit
- The dampers connect to each other by means of the cascading system
- The connection cable used is of the 8-wire telephone type with RJ45 plug connection
- Appropriately configured using the "Polaris 4X" and "Polaris 5X" control units, the damper can take on the function of a motorised circular bypass.

ATTENTION!

Use only Tecnosystemi cables - do not use cables other than those indicated in order not to compromise the correct functioning of the system.

There must always be an inspection hatch to access the control unit and the dampers.

Always install the dampers with the motor facing downwards.

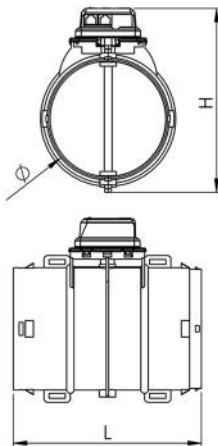

DIMENSIONS

CODE	Ø COUPLER [mm]	H [mm]	L [mm]	MAX. AIR FLOW RATE [m³/h]
11181510	150	230	230	388
11181520	200	280	250	678
11181530	250	330	280	1060
11181540	300	380	350	1526

ITEMS

CODE	DESCRIPTION
11181510	ELECTRIC ROUND DAMPER / ELECTRIC ROUND Ø 150 BY-PASS FOR PRO AIR MULTI-ZONE SYSTEM
11181520	ELECTRIC ROUND DAMPER / ELECTRIC ROUND Ø 200 BY-PASS FOR PRO AIR MULTI-ZONE SYSTEM
11181530	ELECTRIC ROUND DAMPER / ELECTRIC ROUND Ø 250 BY-PASS FOR PRO AIR MULTI-ZONE SYSTEM
11181540	ELECTRIC ROUND DAMPER / ELECTRIC ROUND Ø 300 BY-PASS FOR PRO AIR MULTI-ZONE SYSTEM