


TOP LINE

single insulated copper pipe 50 m

- cod. 11110514 - cod. 11110538 - cod. 11110512
- cod. 11110558 - cod. SCD600009 - cod. 11110534
- cod. 11110514W - cod. 11110538W - cod. 11110512W

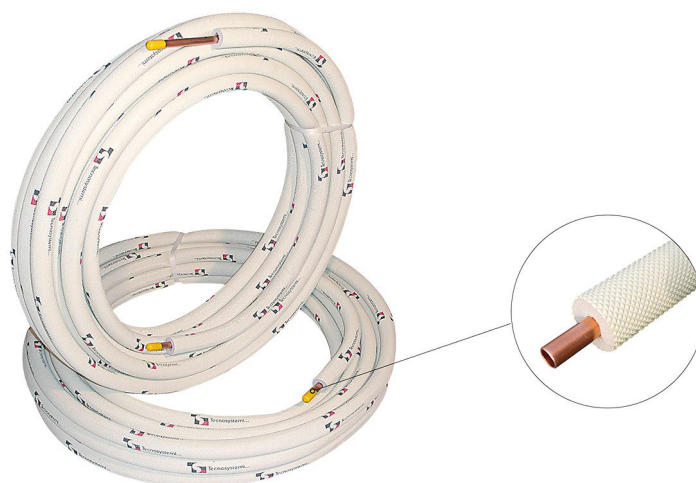

DESCRIPTION

Copper pipe Cu-DHP (in accordance with EN 12735-1) sheathed in a closed-cell expanded polyethylene sheath with a robust, ivory-coloured, corrugated, pyramid-shaped, tear-resistant outer film.

DOES NOT CONTAIN FREON (HCFCs, CFCs or HFCs) in accordance with Law No. 549 of 28/12/1993.

TECHNICAL DATA

CODE	Ø [inch]	Ø [mm]	COPPER THICKNESS [mm]	SHEATH THICKNESS [mm]	MAX. PRESSIONE ESERCIZIO	PRESSIONE DI SCOPPIO
11110514	CU 1/4"	6.35	1	10	125.6	600.8
11110538	CU 3/8"	9.52	1	10	84.8	405.4
11110512	CU 1/2"	12.7	1	10	63.5	303.9
11110558	CU 5/8"	15.88	1	10	50.8	243.1
SCD600009	CU 7/8"	22.22	1	10	46	223
11110534	CU 3/4"	19.05	1	10	42.4	202.6
11110514W	CU 1/4"	6.35	0.8	10	107.9	515.9
11110538W	CU 3/8"	9.52	0.8	10	71	339.4
11110512W	CU 1/2"	12.7	0.8	10	53.9	258

TECHNICAL SPECIFICATIONS OF THE SHEATH

SPECIFICATIONS	TECHNICAL DATA
Operating temperature	-80° C +120° C
Density	30 kg / m ³
Technical conductivity coefficient (EN 12667)	0,038 W/mk @ 10° - 0,042 W/mk @ 40° C
Vapour permeability (UNI EN 13469)	μ = 15000
Fire reaction class (EN 13501)	BL - s2, d0
Toxicity	null

ITEMS

CODE	DESCRIPTION
11110514	"TOP LINE " - 1/4" INSULATED COPPER PIPE, COPPER THICKNESS 1,00 mm,(roll 50 meter)
11110538	"TOP LINE" - 3/8" INDULATED COPPER PIPE, COPPER THICKNESS 1,00 mm,(roll 50 meter)
11110512	"TOP LINE" - 1/2" INSULATED COPPER PIPE, COPPER THICKNESS 1,00 mm,(roll 50 meter)
11110558	"TOP-LINE" - 5/8" INSULATED COPPER PIPE, THICKNESS 1,00 mm, (roll 50 meter)
SCD600009	"TOP LINE" - 7/8" INSULATED COPPER PIPE, COPPER THICKNESS 1 mm,(roll 25 meter)
11110534	"TOP-LINE" - 3/4" INSULATED COPPER PIPE, COPPER THICKNESS 1 mm,(roll 25 meter)
11110514W	"TOP-LINE" - 1/4" INSULATED COPPER PIPES - COPPER THICKNESS 0,8mm - (roll 50 meter)
11110538W	"TOP LINE" - 3/8" INSULATED COPPER PIPE - COPPER THICKNESS 0,8mm - (roll 50 meter)
11110512W	"TOP-LINE" - 1/2" INSULATED COPPER PIPE, COPPER THICKNESS 0,8mm - (roll 50 meter)

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.