

SBR EXTREME 100-8


SBR EXTREME 100-8 vulcanised rubber vibration-resistant floor base

- cod. 11105060 - cod. SCD500237 - cod. SCD500238
- cod. 11105066 - cod. 11105068



TECHNICAL SPECIFICATIONS:

- Floor bases in SBR vulcanised rubber
- "U" shaped aluminium profile is sunk for better sealing
- Built-in spirit level
- Fastening with nut, washer and M8 bolt supplied
- Slots ready for drilling holes for fastening to the floor
- Non-slip, water-draining resting base in armed body
- Ideal for the fastening of outdoor condensing units, VRV-VRF, base-mounted boilers, electrical or tube channels

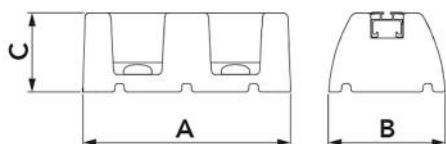

DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]	LOAD CAPACITY [kg]
11105060	250	140	95	200
SCD500237	450	140	95	300
SCD500238	600	140	95	500
11105066	1000	140	95	650
11105068	1200	140	95	750

ITEMS

CODE	DESCRIPTION
11105060	SBR "EXTREME-8" 250 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8
SCD500237	SBR "EXTREME-8" 450 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8
SCD500238	SBR "EXTREME-8" 600 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8
11105066	SBR "EXTREME-8" 1000 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8
11105068	SBR "EXTREME-8" 1200 - FOOT MOUNT WITH ALU PROFILE, FIXING BOLT, WASHER AND NUT M8

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.