



Insulated plenum with upper coupler for linear diffuser with rotary deflector 1 slot

- cod. PWD400342 - cod. PWD400343 - cod. PWD400344
- cod. PWD400345 - cod. PWD400346

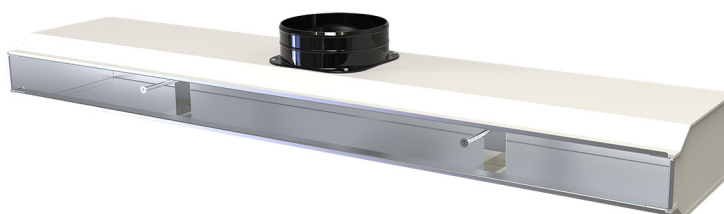

TECHNICAL SPECIFICATIONS:

- Insulated galvanized sheet
- Outer closed cell polyethylene coating (thickness 3 mm)
- Collars supplied
- Screw kit for fastening the supplied linear diffuser

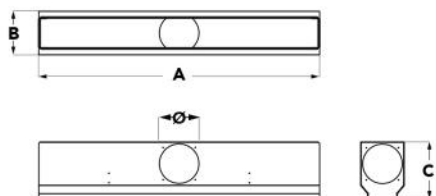

DIMENSIONS

CODE	DIMENSION A [mm]	DIMENSION B [mm]	DIMENSION C [mm]	NO. OF COLLARS SUPPLIED / MOD.
PWD400342	630	105	215	1 pc. / E5 (Ø150)
PWD400343	830	105	215	1 pc. / E5 (Ø150)
PWD400344	1030	105	215	1 pc. / E5 (Ø150)
PWD400345	1530	105	215	1 pc. / E5 (Ø150)
PWD400346	2030	105	215	2 pc. / E5 (Ø150)

ITEMS

CODE	DESCRIPTION
PWD400342	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.600
PWD400343	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.800
PWD400344	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.1000
PWD400345	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.1500
PWD400346	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 1 SLOT L.2000

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.