

OPTIMA MRS

left rotation sleeve

- cod. SCD100097 - cod. SCD100130 - cod. SCD100098
 - cod. SCD100167 - cod. SCD100220



TECHNICAL SPECIFICATIONS:

- Stiff, shockproof, anti-UVA PVC, white or grey, recyclable
- Innovative design
- Ultra-fast interlocking fastening system
- Extremely high outer finish
- Heat shrink barcode packaging

MODELS AVAILABLE:




WHITE RAL 9010



GREY
 ANTRACITE RAL
 7016

SPECIFICATIONS

MRS 62-OPT composed of: MRS 75-OPT and no. 2 reductions for ducts sized 62
 MRS 75-OPT composed of RH rotation sleeve sized 75

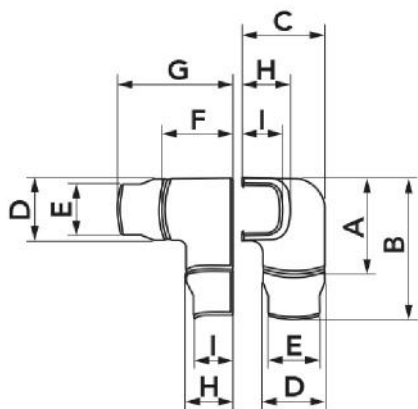

DIMENSIONS

CODE	MODEL	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]
SCD100097	MRS 62 - OPT	119	174	102	78	66	87	143	58	48
SCD100130	MRS 62 - OPT	103	--	86	64	--	78	--	49	--
SCD100098	MRS 75 - OPT	119	--	102	78	--	87	--	58	--
SCD100167	MRS 75 - OPT	119	--	102	78	--	87	--	58	--
SCD100220	MRS 75 - OPT	119	--	102	78	--	87	--	58	--

ITEMS

CODE	DESCRIPTION
SCD100097	"OPTIMA MRS" LEFT ROTATION REDUCED COUPLING - WHITE - MRS 62-OPT
SCD100130	"OPTIMA MRS" LEFT ROTATION COUPLING - WHITE - MRS 62-OPT
SCD100098	"OPTIMA MRS" LEFT ROTATION COUPLING - WHITE - MRS75-OPT
SCD100167	"OPTIMA MRS" LEFT ROTATION COUPLING - ANTHRACITE GREY Mod. MRS75-OPT
SCD100220	"OPTIMA MRS" LEFT ROTATION COUPLING - BLACK - MRS75-OPT

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.