


# FSDRL

support with wide base with double adjustment on tiled roofs


- cod. FVD300002 - cod. FVD300002BOX

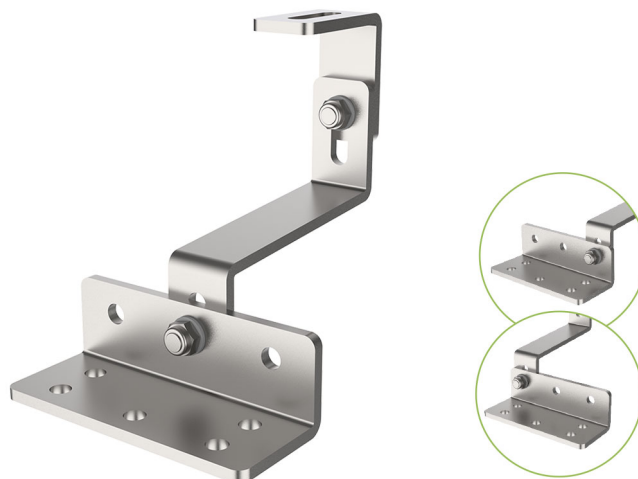

## TECHNICAL SPECIFICATIONS:

- Material: AISI 304 stainless steel
- Flexural modulus of elasticity: 196000 N/mm<sup>2</sup>
- Tensile breaking load: 515 N/mm<sup>2</sup>
- 5 holes Ø 9 prepared for plate fixing
- Hook dimensions: 30mm x 5mm thickness

## TECHNICAL DRAWING:

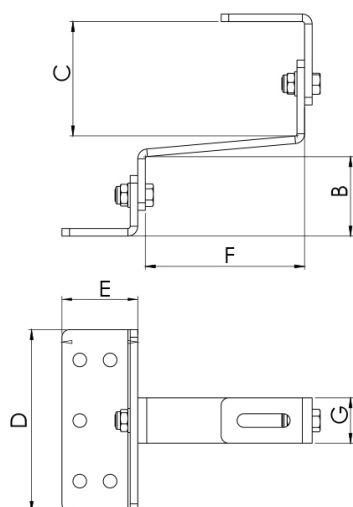


## FULL SIZED:

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]
FVD300002	145	41 ÷ 52	60 ÷ 80	120	50	105	30
FVD300002BOX	145	41 ÷ 52	60 ÷ 80	120	50	105	30

## APPLICATION:

Fixing of photovoltaic systems on roofing tiles supported by strips of varying thickness.

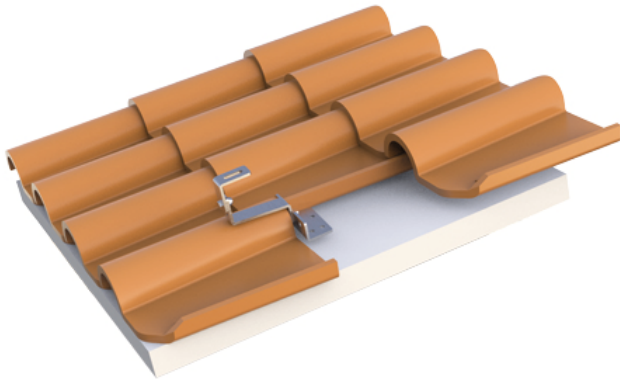

## ITEMS

CODE	DESCRIPTION
FVD300002	FSDRL - SUPPORT WITH WIDE BASE AND DOUBLE ADJUSTMENT
FVD300002BOX	FSDRL - SUPPORT WITH WIDE BASE AND DOUBLE ADJUSTMENT - BOX 10 pcs

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.