


# FVP-300

high strength profile

- cod. FVD100023 - cod. FVD100045 - cod. FVD100024
- cod. FVD100049 - cod. FVD100029



## DIMENSIONS

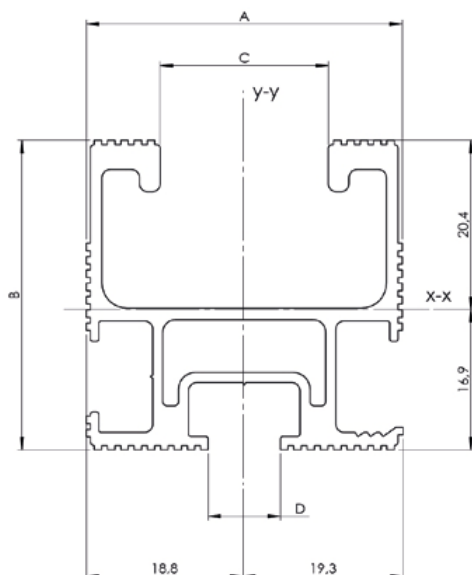

All rights relating to this publication are the exclusive property of Tecnosystemi SpA. Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

CODE	LENGTH [mm]	A [mm]	B [mm]	C [mm]	D [mm]
FVD100023	3300	38	37	20	8.5
FVD100048	3600	38	37	20	8.5
FVD100024	4400	38	37	20	8.5
FVD100049	4700	38	37	20	8.5
FVD100029	6600	38	37	20	8.5

## DESCRIPTION

High-strength aluminium alloy profile with anti-slip groove.  
Possibility of installation with insulating spacer cod. HDPH145.

## TECHNICAL SPECIFICATIONS

SPECIFICATIONS	TECHNICAL DATA
Material:	EN AW 6060
Profile weight:	0,9 kg/m
Cross-section:	317 mm <sup>2</sup>
Modulus of Elasticity:	66000 N/mm <sup>2</sup>
Moment of inertia:	I <sub>x</sub> 48084 mm <sup>4</sup>
Moment of inertia:	I <sub>y</sub> 54233mm <sup>4</sup>
Resistance modulus:	W <sub>x</sub> 2357 mm <sup>3</sup>
Resistance modulus:	W <sub>y</sub> 2810 mm <sup>3</sup>

## ITEMS

FVD100023	PROFILE FVP-300/3.3
FVD100045	
FVD100024	PROFILE FVP-300/4.4
FVD100049	
FVD100029	PROFILE FVP-300/6.6

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.