

SORRISO CLIMA LED-SC 11 LT E SORRISO CLIMA - SC 11 LT



condensate drain sub-split pump

- cod. 12170100L - cod. 12170100




SORRISO

TECHNICAL SPECIFICATIONS:

- Flow rate 11 l/h for air conditioners up to 10 kW
- Max. 8 m vertical delivery between pump and water outlet
- Transparent tank that can be inspected for routine maintenance
- Power supply 230V - 50Hz
- Alarm contact C-NO 6A
- Power consumption 19 W
- Max noise level 21 [dB(A)]
- Protection rating IP20
- Also available with pump operation LED indicator light
- Pipe dimensions \varnothing 4 x 6 mm
- Pump dimensions W 225 x H 70 x D 60 mm

SORRISO CLIMA 11 LT

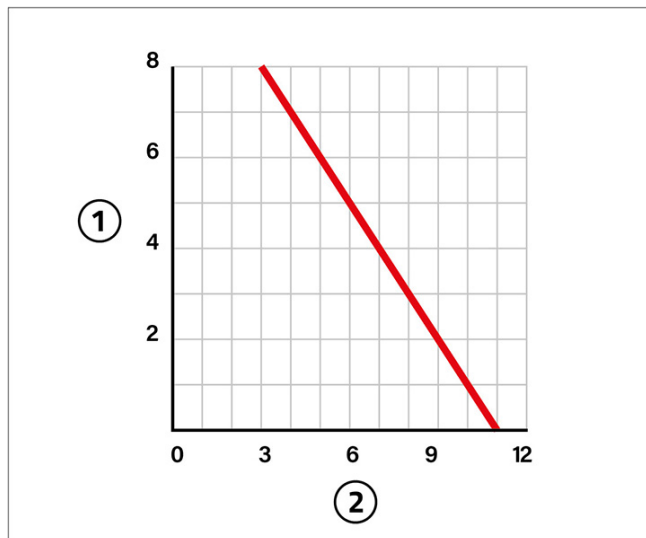

[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

- For air conditioners up to 10 kW
- Max. 8 m vertical delivery
- Max noise level 21 [dB(A)]

ASSEMBLY APPLICATIONS

- wall-mounted air conditioners
- wall-mounted fan coils

ITEMS

CODE	DESCRIPTION
12170100L	UNDERMOUNT SPLIT CONDENSATE PUMP SORRISO CLIMA LED-SC 11 LT.
12170100	UNDERMOUNT SPLIT CONDENSATE PUMP SORRISO CLIMA-SC 11 LT.

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.