

TOTAL AIR

CO₂ probe for heat recovery unit

- cod. ACD600027




DESCRIPTION

The micro-processor controlled room probe is maintenance-free and allows the presence of CO₂ in the air to be detected. The measurement signals are transformed into standard 0-10V or 4...20 mA signals.

The room probe measures the CO₂ in the range of 0...2000 ppm or 0...5000 ppm.

In stylish plastic casing, with snap-on lid, bottom 4-hole fixing, for mounting in vertically or horizontally installed under-track boxes, with pre-determined breaking point for wall attachment. The CO₂ content of the air is detected by the NDIR optical sensor (non-dispersive infrared technology).

DIMENSIONS

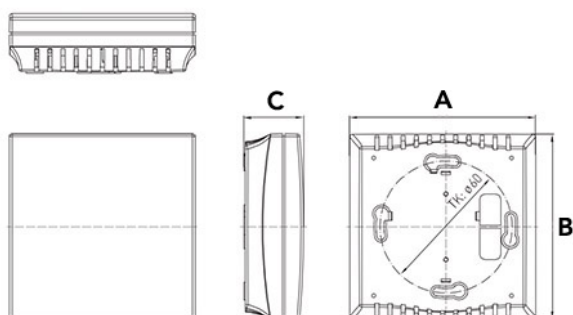

CODE	A [mm]	B [mm]	C [mm]
ACD600027	85	85	27,5


DATA

SPECIFICATIONS	DATA
Voltage supply	24V AC/DC ($\pm 10\%$)
Power consumption	< 1.5W/24V DC typical; < 2.9VA/24V AC typical; max. current 200 mA
CO ₂ Sensor	NDIR optical sensor (non-dispersive infrared technology) with automatic and manual calibration
CO ₂ measurement range	0... 2000 / 0... 5000 ppm 0... 2000 ppm; 0... 5000 ppm
CO ₂ outlet	0-10 V or 4...20 mA (selectable via DIP switch)
Measuring accuracy CO ₂	± 30 ppm $\pm 3\%$ of measurement value
Depending on the temperature CO ₂	± 5 ppm / °C or $\pm 0.5\%$ of the measurement value / °C whichever is greater
Pressure sensitivity	$\pm 0.13\%$ / mm Hg $\pm 0.5\%$ of the measurement value / °C whichever is greater
Long-term Stability	<2% in 15 years whichever is greater
Gas exchange	Diffusion based on the greater value
Relay output	with 24 V potential-zero exchange contact (selectable assignment via DIR switch) based on the greater value
Room temperature	0... +50 °C
Start-up time	about 1 hour
Response time	< 2 minutes
Electrical connection	0.14 - 1.5 mm ² , via screw clamps
Casing	plastic, ABS material, pure white colour (similar to RAL 9010)
Dimensions [mm]	85 x 85 x 27 mm
Assembly	wall-mounted or under-track, Ø 55 mm, bottom with 4 holes, for installation in vertical or horizontal under-track boxes
Protection class	III (according to EN 60730)
Protection rating	IP 30 (according to EN 60529)
Standards	EC compliant electromagnetic compatibility according to EN 61 326 EMC Directive 2014/30 EU Low Voltage Directive 2014/35/EU

TECHNICAL DATA


SPECIFICATIONS	DATA
CO2 measurement range	DIP1
0... 2000 ppm (default)	OFF
0... 5000 ppm	ON
Automatic CO ₂ adjustment of the zero point	DIP3
disabled	OFF
enabled (default)	ON
Outlet	DIP4
Voltage 0-10 V (default)	OFF
Current 4... 20 mA	ON
Note: DIP 2 and DIP 5 are not assigned!	--

DIP switch

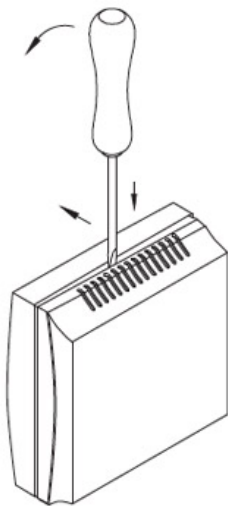

To open the case, insert a screwdriver (2.0) into the middle of the slot, press down and lift the frame slightly from the bottom.
Pull the lid forward and hold.

CONTROL DIAGRAM

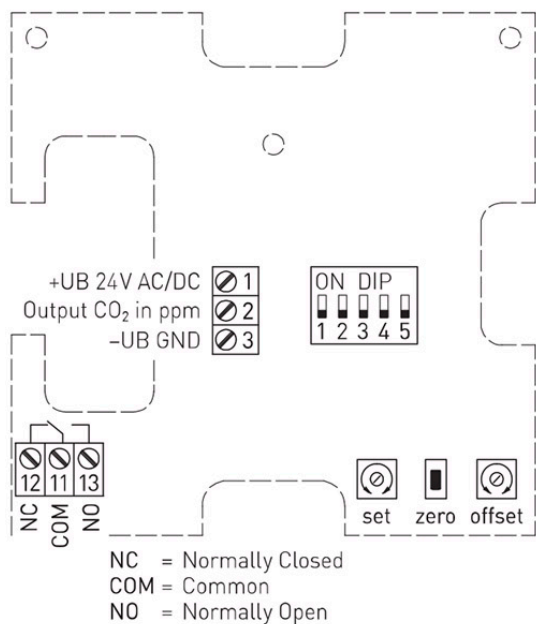

CONNECTION DIAGRAM

- ① UB+ 24V AC/DC
- ② Output CO₂ 0-10V/4...20mA
- ③ UB- GND in ppm

- ⑬ NO (Normally Open)
- ⑪ COM (Common)
- ⑫ NC (Normally Closed)

potential-free
 changeover contact 24V
 optional

ITEMS

CODE	DESCRIPTION
ACD600027	CO2 A PROBE FOR "TOTAL AIR" HEAT RECOVERY UNIT

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.