

Compact gas meter for household use in aluminium class G4 for methane / LPG

- cod. 26000210



DESCRIPTION


The compact gas meter is designed for domestic use, with high performance in terms of measurement accuracy and safety: in particular, the magnetic transmission excludes any possibility of gas leakage, reducing load losses.

The gas meter is designed for the assembly of a pulse generator (1 imp = 0.01 m³) for remote reading.

The epoxy powder coating guarantees perfect protection against atmospheric agents; in any case it is good practice to protect the meter from the direct action of ultraviolet rays and from the weather.

TECHNICAL SPECIFICATIONS:

- Max operating pressure p max = 2.0 bar aluminium
- Operating temperature -25°C to +55°C
- Max numerator display 99999,999 m³
- Starting flow rate 0.005 m³/h
- MID approval
- Equipped with a mechanical anti-return lock
- Colour RAL 7035
- Approvals: CE-MID; EN 1359

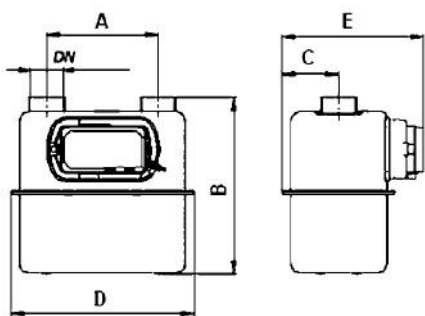

DIMENSIONS:

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
26000210	110	210	75	210	175

TECHNICAL DATA

CODE	CYCLIC V [dm ³]	CONNECTIONS [dn]	MIN FLOW RATE [m ³ /h]	MAX FLOW RATE [m ³ /h]	WEIGHT [kg]
26000210	1,2	1 1/4" gas	0,04	6	1,9

ITEMS

CODE	DESCRIPTION
26000210	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.