

SBR EXTREME 100-20


SBR EXTREME 100-8 vulcanised rubber vibration-resistant floor base

- cod. 11105060V - cod. SCD500241 - cod. SCD500242
- cod. 11105066V - cod. 11105068V



TECHNICAL SPECIFICATIONS:

- Floor bases in SBR vulcanised rubber
- "U" shaped aluminium profile is sunk for better sealing
- Built-in spirit level
- Fastening with threaded plate, washer and M8 bolt supplied
- Slots ready for drilling holes for fastening to the floor
- Non-slip, water-draining resting base in armed body
- Ideal for the fastening of outdoor condensing units, VRV-VRF, base-mounted boilers, electrical or tube channels

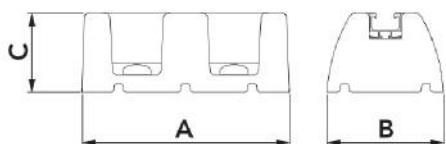

DIMENSIONS

| CODE | A [mm] | B [mm] | C [mm] |
|-----------|--------|--------|--------|
| 11105060V | 250 | 140 | 95 |
| SCD500241 | 450 | 140 | 95 |
| SCD500242 | 600 | 140 | 95 |
| 11105066V | 1000 | 140 | 95 |
| 11105068V | 1200 | 140 | 95 |

TECHNICAL DATA

| CODE | LOAD CAPACITY [kg] |
|-----------|--------------------|
| 11105060V | 200 |
| SCD500241 | 300 |
| SCD500242 | 500 |
| 11105066V | 650 |
| 11105068V | 750 |

ITEMS

| CODE | DESCRIPTION |
|-----------|---|
| 11105060V | SBR "EXTREME-20" 250 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8 |
| SCD500241 | SBR "EXTREME-20" 450 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8 |
| SCD500242 | SBR "EXTREME-20" 600 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8 |
| 11105066V | SBR "EXTREME-20" 1000 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8 |
| 11105068V | SBR "EXTREME-20" 1200 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8 |

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.