

# Intake grille in anodised aluminium

- cod. W11161530 - cod. W11161535 - cod. W11161540
- cod. PWC100022 - cod. PWC100023 - cod. W11161542
- cod. W11161545 - cod. W11161549 - cod. W11161550
- cod. W11161552 - cod. W11161554 - cod. W11161555



## TECHNICAL SPECIFICATIONS:

- Made of anodised aluminium
- Fastening by means of clips
- Adjustable horizontal flaps
- For wall installation
- Installation height 2.5 - 3.5 m


## DIMENSIONS:

| CODE      | EXTERNAL DIMENSIONS [mm] | BACK NECK [mm] | INSTALLATION HOLE [mm] | REAR COLLAR DEPTH [mm] |
|-----------|--------------------------|----------------|------------------------|------------------------|
| W11161530 | 232 x 132                | 190 x 90       | 200 x 100              | 26                     |
| W11161535 | 332 x 132                | 290 x 90       | 300 x 100              | 26                     |
| W11161540 | 432 x 132                | 390 x 90       | 400 x 100              | 26                     |
| PWC100022 | 632 x 132                | 590 x 90       | 600 x 100              | 26                     |
| PWC100023 | 1032 x 132               | 990 x 90       | 1000 x 100             | 26                     |
| W11161542 | 332 x 182                | 290 x 140      | 300 x 150              | 26                     |
| W11161545 | 332 x 232                | 290 x 190      | 300 x 200              | 26                     |
| W11161549 | 432 x 182                | 390 x 140      | 400 x 150              | 26                     |
| W11161550 | 432 x 232                | 390 x 190      | 400 x 200              | 26                     |
| W11161552 | 532 x 182                | 490 x 140      | 500 x 150              | 26                     |
| W11161554 | 532 x 232                | 490 x 190      | 500 x 200              | 26                     |
| W11161555 | 532 x 332                | 490 x 290      | 500 x 300              | 26                     |

## TECHNICAL DATA

| Ak [m²] | Q min. [m³/h] | Q max.[m³/h] | LwA min [dB(A)] | LwA max [dB(A)] | X max (0.25) | X min (0.25) | Dpt min [Pa] | Dpt max [Pa] |
|---------|---------------|--------------|-----------------|-----------------|--------------|--------------|--------------|--------------|
| 0,0088  | 110           | 220          | 22              | 41              | 2,4          | 4,8          | 5            | 20           |
| 0,0144  | 180           | 350          | 25              | 42              | 3,1          | 6            | 5            | 20           |
| 0,02    | 240           | 490          | 25              | 44              | 3,5          | 7,2          | 5            | 20           |
| 0,0311  | 380           | 760          | 28              | 46              | 4,5          | 8,9          | 5            | 20           |
| 0,0534  | 650           | 1300         | 30              | 49              | 5,8          | 11,6         | 5            | 20           |
| 0,0228  | 280           | 550          | 26              | 45              | 3,8          | 7,5          | 5            | 20           |
| 0,0311  | 380           | 760          | 28              | 46              | 4,5          | 8,9          | 5            | 20           |
| 0,0311  | 380           | 760          | 28              | 46              | 4,5          | 8,9          | 5            | 20           |
| 0,0423  | 510           | 1030         | 29              | 48              | 5,1          | 10,4         | 5            | 20           |
| 0,0395  | 480           | 960          | 29              | 47              | 5            | 10           | 5            | 20           |
| 0,0534  | 650           | 1300         | 30              | 49              | 5,8          | 11,6         | 5            | 20           |
| 0,0813  | 990           | 1970         | 32              | 51              | 7,2          | 14,3         | 5            | 20           |

## RAPID AIR FLOW SELECTION

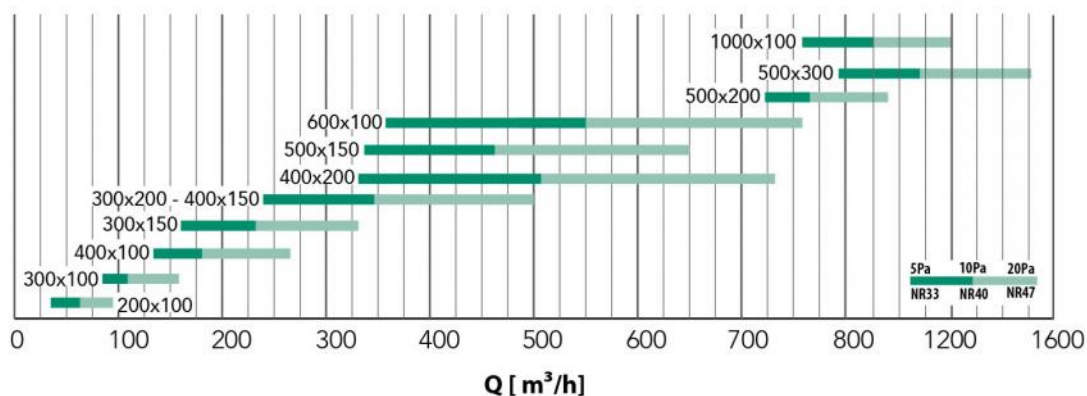

## ITEMS

| CODE      | DESCRIPTION                                  |
|-----------|--|
| W11161530 | ANODISED ALUMINIUM RETURN GRILLES 232x132mm  |
| W11161535 | ANODISED ALUMINIUM RETURN GRILLES 332x132mm  |
| W11161540 | ANODISED ALUMINIUM RETURN GRILLES 432x132mm  |
| PWC100022 | ANODISED ALUMINIUM RETURN GRILLES 632X132mm  |
| PWC100023 | ANODISED ALUMINIUM RETURN GRILLES 1032x132mm |
| W11161542 | ANODISED ALUMINIUM RETURN GRILLES 332x182mm  |
| W11161545 | ANODISED ALUMINIUM RETURN GRILLES 332x232mm  |
| W11161549 | ANODISED ALUMINIUM RETURN GRILLES 432x182mm  |
| W11161550 | ANODISED ALUMINIUM RETURN GRILLES 432x232mm  |
| W11161552 | ANODISED ALUMINIUM RETURN GRILLES 532x182mm  |
| W11161554 | ANODISED ALUMINIUM RETURN GRILLES 532x232mm  |
| W11161555 | ANODISED ALUMINIUM RETURN GRILLES 532x332mm  |

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.