

OPTIMA TB

duct with level

- cod. B-11130062 - cod. B-11130075 - cod. B-11130100




TECHNICAL SPECIFICATIONS:

- Stiff, shockproof, anti-UVA PVC, white, recyclable
- Sharp-edged bottom
- Pre-punched slots for wall mounting
- Four-way sliding spirit level supplied on each 2m bar
- Prepared for insertion of the mini pumps Easy Flow, Easy One, Aqua Split (only model TB 75-OPT)
- Central closure with patented accidental anti-release
- Rounded cover
- Bar length 2 m
- Paintable
- Operating temperature -20°C / +60°C


MODELS AVAILABLE:



WHITE RAL 9010



Vertikale duct




Horizontal duct



Duct installation without built-in level



Duct installat

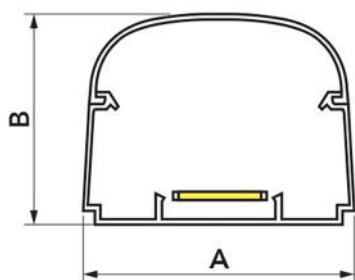

DIMENSIONS

CODE	MODEL	A [mm]	B [mm]
B-11130062	TB 62 - OPT	62	46
B-11130075	TB 75 - OPT	74	56
B-11130100	TB 102 - OPT	100	66

ITEMS

CODE	DESCRIPTION
B-11130062	TB62 -OPT - "OPTIMA TB" TB62 TRUNKING WITH SPIRIT LEVEL - 2 mt. long
B-11130075	TB75 -OPT - "OPTIMA TB" TB75 TRUNKING WITH SPIRIT LEVEL - 2 mt. long
B-11130100	TB102 -OPT - "OPTIMA TB" TB102 TRUNKING WITH SPIRIT LEVEL - 2 mt. long

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.