

# DISCOVERY 3X

wall-mounted backlit programmable thermostat with touch, battery-run radio frequency

- cod. GAD100005




## TECHNICAL SPECIFICATIONS:

- Power supply battery 4 x 1.5 V type AAA (LR03) supplied
- Battery life 18/24 months (normal use)
- 868 Mhz RF data transmission
- RF signal range 50 m maximum in open field between chronothermostat and "Polaris" control unit
- 4.5" backlit LCD display

## FUNCTIONS

- Touch keypad
- Features: chronological or manual
- Automatic or manual adjustment of damper and nozzle
- Timed thermostat lock
- Temperature scale °C / °F
- RH display in %
- Humidity control in radiant cooling mode with relay module
- Ready for window contact
- AT and set point value
- Clock (AM - PM / 24h)
- Daily and weekly feature
- Wall mounted using template, screws and fixing plugs supplied

## DIMENSIONS

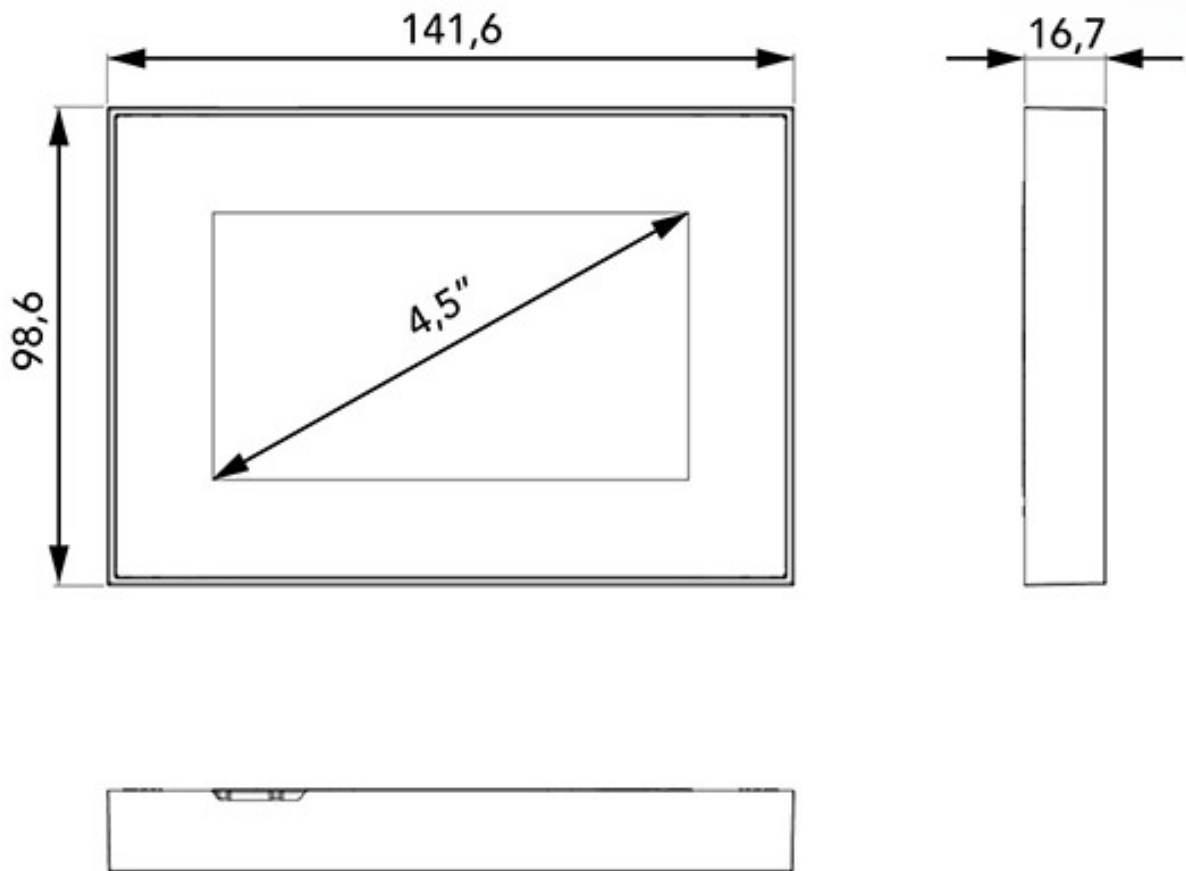

## ITEMS

CODE	DESCRIPTION
GAD100005	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.