


HSTL 105/20-62

HSTL 120 / 40-62 support for fixing on pitched roofs

- cod. 11110708 - cod. 11110708BOX - cod. 11110708Z
- cod. 11110708ZBOX

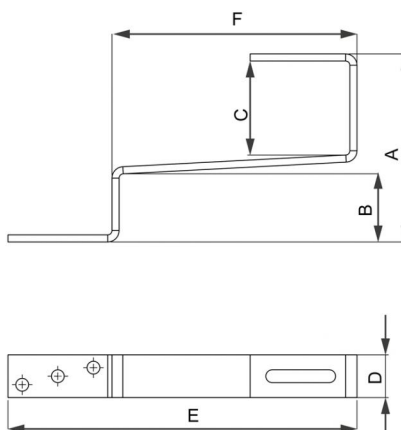

DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
11110708	105	20	62	30	325	245
11110708BOX	105	20	62	30	325	245
11110708Z	105	20	62	30	325	245
11110708ZBOX	105	20	62	30	325	245

DESCRIPTION

AISI 304 stainless steel and/or hot-dip galvanized steel mount for fastening PV systems on roofs with flat tiles, roof tiles or lose tiles.

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS	11110708	11110708BOX	1111078Z	1111078ZBOX
Material	AISI 304 stainless steel		hot-dip galvanized steel	
Thickness	5 mm			
Flexural modulus of elasticity	196000 N/mm ²		/	
Tensile breaking load	515 N/mm ²		/	
Tensile strength	/		440 N/mm ²	
Holes for roof mounting	3x Ø9			

ITEMS

11110708	SUPPORT FOR FIXING ON ROOFS HSTL 105/20-62 INOX AISI 304
11110708BOX	SUPPORT FOR FIXING ON ROOFS HSTL 105/20-62 INOX AISI 304 - BOX 10 pcs
11110708Z	SUPPORT FOR FIXING ON ROOFS HSTL 105/20-62 ZINCATO
11110708ZBOX	SUPPORT FOR FIXING ON ROOFS HSTL 105/20-62 GALVANIZED- BOX 10 pcs

All rights relating to this publication are the exclusive property of Tecnosystemi SpA. Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.