



# Insulated plenum with upper coupler for linear diffuser with rotary deflector 2 slots

- cod. PWD400347 - cod. PWD400348 - cod. PWD400349  
- cod. PWD400350 - cod. PWD400351

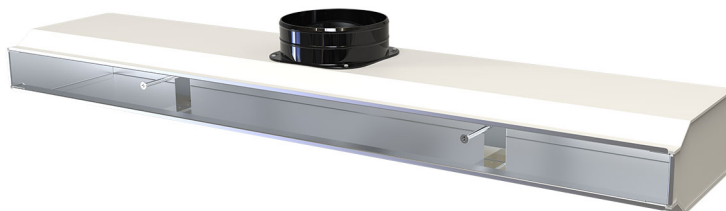

## TECHNICAL SPECIFICATIONS:

- Made of insulated galvanised metal sheet
- Outer closed cell polyethylene coating (thickness 3 mm)
- Collars supplied
- Screw kit for fastening the supplied linear diffuser

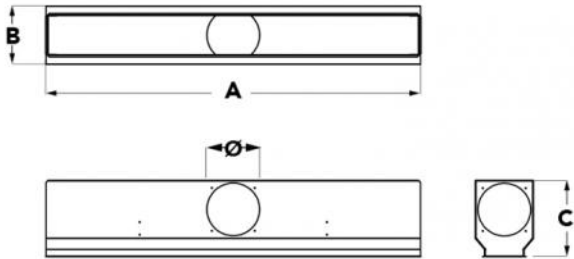

## DIMENSIONS

CODE	DIMENSION A [mm]	DIMENSION B [mm]	DIMENSION C [mm]	NO. OF UPPER COLLARS SUPPLIED / MOD.
PWD400347	630	165	215	1 pc. / E5 (Ø150)
PWD400348	830	165	215	1 pc. / E5 (Ø150)
PWD400349	1030	165	215	1 pc. / E5 (Ø150)
PWD400350	1530	165	215	1 pc. / E5 (Ø150)
PWD400351	2030	165	215	2 pc. / E5 (Ø150)

## ITEMS

CODE	DESCRIPTION
PWD400347	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.600
PWD400348	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.800
PWD400349	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.1000
PWD400350	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.1500
PWD400351	INSULATED PLENUM WITH UPPER CONNECTION FOR LINEAR DIFFUSER WITH ROTARY DEFLECTOR 2 SLOTS L.2000

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.  
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.