

## NEW LINE

### insulated copper pipe coupled


- cod. N11110038 - cod. N11110012



## DESCRIPTION

Copper pipe Cu-DHP (in accordance with EN 12735-1) sheathed in a closed-cell, expanded polyethylene sheath with a robust, white-coloured, corrugated, pyramid-shaped tear-resistant outer film.

DOES NOT CONTAIN FREON (HCFCs, CFCs or HFCs) in accordance with Law No. 549 of 28/12/1993.

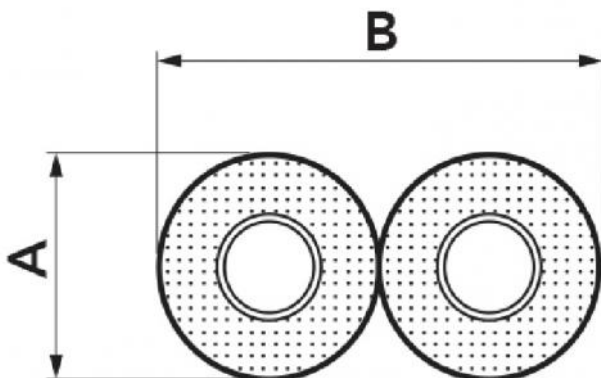

## TECHNICAL DATA

CODE	Ø [inch]	Ø [mm]	COPPER THICKNESS [mm]	SHEATH THICKNESS [mm]	A x B DIMENSIONS [mm]	MAX. OPERATING PRESSURE [bar]	BURST PRESSURE [bar]
N11110038	CU 1/4" - 3/8"	6,35 - 9,52	1,0 - 1,0	6	27 x 53	125,6 - 84,8	600,8 - 405,4
N11110012	CU 1/4" - 1/2"	6,35 - 12,7	1,0 - 1,0	6	31 x 56	125,6 - 63,5	600,8 - 303,9

## TECHNICAL SPECIFICATIONS OF THE SHEATH

SPECIFICATIONS	TECHNICAL DATA
Operating temperature	-45° C +105° C
Density	30 kg / m <sup>3</sup>
Technical conductivity coefficient (EN 12667)	0,035 W/mk @ 10° - 0,039 W/mk @ 40° C
Vapour permeability (UNI EN 13469)	μ > 10000
Fire reaction class (EN 13501)	BL - s1, d0
Toxicity	null

## ITEMS

CODE	DESCRIPTION
N11110038	"NEW LINE" - 1/4"-3/8", INSULATED COPPER PIPES, COPPER THICKNESS 1,00mm, (roll 20 meter)
N11110012	"NEW LINE" - 1/4"-1/2"INSULATED COPPER PIPES, COPPER THICKNESS 1,00mm, (roll 20 meter)

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.  
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.