


Cable tie for fixing pipes in duct

- cod. 11125010 - cod. 11125000

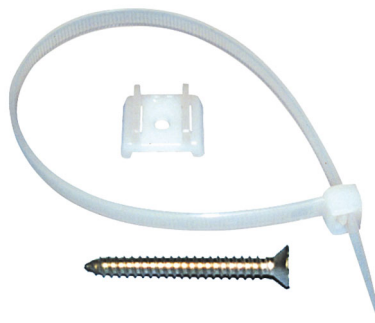

DESCRIPTION

The pipe clamp is made in polyamide 6.6, with high strength, hardness and flexibility.
The clamp is used to fix both the duct to the walls and the pipes inside at the same time.


APPLICATIONS

Conditioning pipe fixing in ducts.

REFERENCE STANDARDS

The clamp complies with the REACH Regulation (1907/2006), RoHS Directive (2011/65/UE) and the HALOGEN FREE standard.

DIMENSIONS

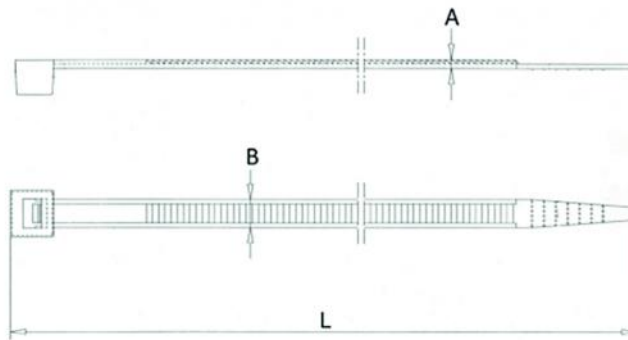


CODE	MODEL	L [mm]	A [mm]	B [mm]	MAX TIGHTENING [Ø mm]	MAX SPRING TENSION [kg/f]
11125010	X T - 60	280	1.2	3.5	74	18
11125000	X T - 72 / T - 100	300	1.5	7.5	75	55

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS	
Material:	Polyamide 6.6
Humidity absorption (50% relative humidity):	2.7%
Operating temperature:	-40°C +85°C
Usage temperature:	-10°C +60°C
Degree of combustion:	UL94 class V2
Halogen-free:	yes

EXAMPLE OF INSTALLATION:

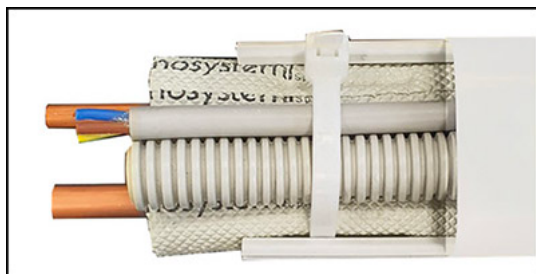

ITEMS

CODE	DESCRIPTION
11125010	TIES FOR FASTENING PIPES IN TRUNKING T-60
11125000	TIES FOR FASTENING PIPES IN TRUNKING T-72/100

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

