

WINDOW


electric extractor

- cod. 11104034 - cod. 11104035



TECHNICAL SPECIFICATIONS:

- Made of ABS
- Automatic flap opening
- Recommended for extracting air from kitchens, shops, offices and restaurants
- Ideal for mounting on windows or glazing
- Equipped with adjustable timer option from 2 to 30 minutes

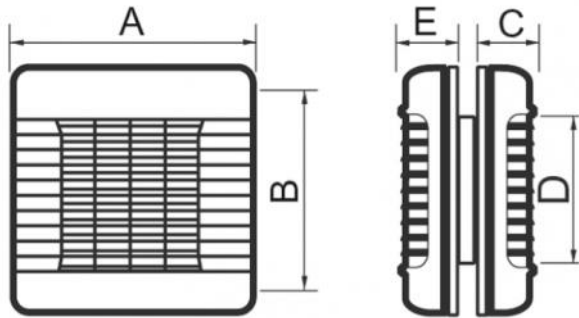

DIMENSIONS

| CODE | MODEL | A [mm] | B [mm] | C [mm] | D [mm] | E [mm] |
|----------|--------------|--------|--------|--------|--------|--------|
| 11104034 | WINDOW Ø 125 | 190 | 173 | 53 | 125 | 58 |
| 11104035 | WINDOW Ø 150 | 212 | 195 | 60 | 150 | 66 |

TECHNICAL DATA

| TECHNICAL SPECIFICATIONS | Ø 125 | Ø 150 |
|--------------------------|-------|-------|
| Power supply [V] | 230 | 230 |
| Frequency [Hz] | 50 | 50 |
| Power [W] | 22 | 26 |
| Absorbed current [A] | 0,100 | 0,130 |
| Air flow rate [m³/h] | 185 | 295 |
| Air pressure [Pa] | 55 | 80 |
| Max sound level [dB(A)] | 35 | 41 |
| SPEED [RPM] | 2400 | 2400 |
| Weight [kg] | 1,15 | 1,53 |

ITEMS

| CODE | DESCRIPTION |
|----------|------------------------------------|
| 11104034 | "WINDOW" ELECTRIC EXTRACTOR, D.125 |
| 11104035 | "WINDOW" ELECTRIC EXTRACTOR, D.150 |

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.