


# OPTIMA RL

in-line connection for Excellens and Optima duct

- cod. SCD100142 - cod. SCD100143

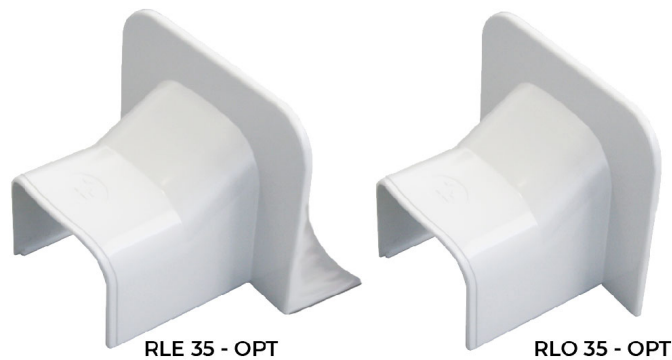


## TECHNICAL SPECIFICATIONS:

- Stiff, shockproof, anti-UVA PVC, white, recyclable
- Innovative design
- Ultra-fast interlocking fastening system
- Large outer flange
- Hole covers
- Extremely high outer finish
- Heat shrink barcode packaging
- Paintable
- Operating temperature -20°C / +60°C

## MODELS AVAILABLE:



WHITE

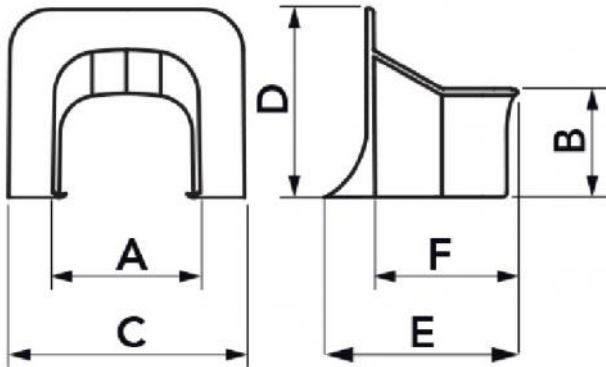

## DIMENSIONS

CODE	MODEL	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
SCD100142	RLO 35 - OPT	35	28	52	37		42
SCD100143	RLE 35 - OPT	35	28	52	37	55	

## ITEMS

CODE	DESCRIPTION
SCD100142	RLO35-OPT - "OPTIMA RL" LINEAR COUPLING LINE FITTING FOR OPTIMA TRUNKING
SCD100143	RLE35-OPT - "OPTIMA RL" LINEAR COUPLING LINE FITTING FOR EXCELLENS TRUNKING

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.  
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.