


HSTL 60

HSTL 120 / 40-62 support for fixing on pitched roofs

- cod. 11110707 - cod. 11110707BOX - cod. 11110707Z
- cod. 11110707ZBOX

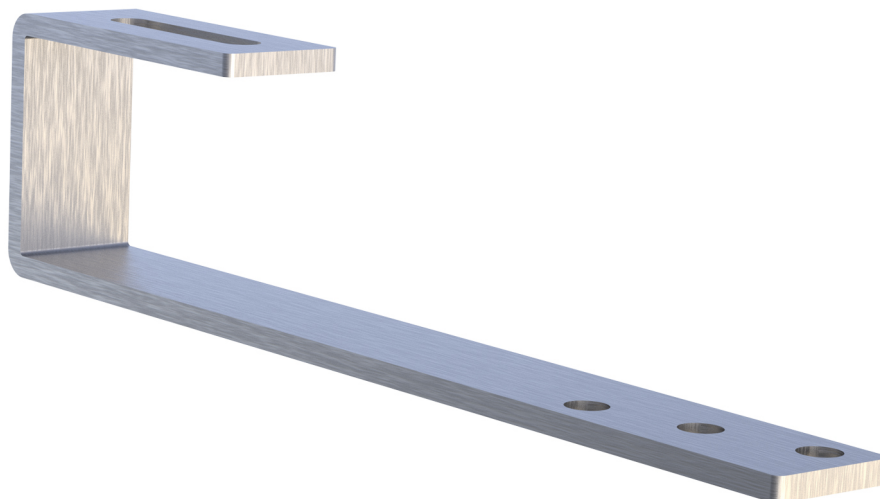

TECHNICAL SPECIFICATIONS:

- Material: AISI 304 stainless steel
- Flexural modulus of elasticity: 196000 N/mm²
- Tensile breaking load: 515 N/mm²
- Hook dimensions: 30mm x 5mm thickness
- No. 3 Ø9 holes prepared for plate fixing

TECHNICAL SPECIFICATIONS:

- Material: galvanised steel
- Tensile strength: 440 N/mm²
- Treatment: hot dip galvanised
- Hook dimensions: 30mm x 5mm thickness
- 3 holes Ø 9 prepared for plate fixing

STAINLESS STEEL CODE

CODE	DESCRIPTION
11110707	SUPPORT FOR FIXING ON ROOFS HSTL 60 INOX AISI 304
11110707BOX	SUPPORT FOR FIXING ON ROOFS HSTL 60 INOX AISI 304 - BOX 10 pcs

GALVANISED STEEL CODE

CODE	DESCRIPTION
11110707Z	SUPPORT FOR FIXING ON ROOFS HSTL 60 ZINCATO
11110707ZBOX	SUPPORT FOR FIXING ON ROOFS HSTL 60 GALVANIZED- BOX 10 pcs

All rights relating to this publication are the exclusive property of Tecnosystemi SpA. Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.