

HSTCFX

fixed support for fixing on tiled roofs


- cod. FVD300003 - cod. FVD300003BOX



TECHNICAL SPECIFICATIONS:

- Material: AISI 304 stainless steel
- Flexural modulus of elasticity: 196000 N/mm²
- Tensile breaking load: 515 N/mm²
- Hook dimensions: 30mm x 5mm thickness
- 2 holes Ø 9 prepared for plate fixing

TECHNICAL DRAWING:

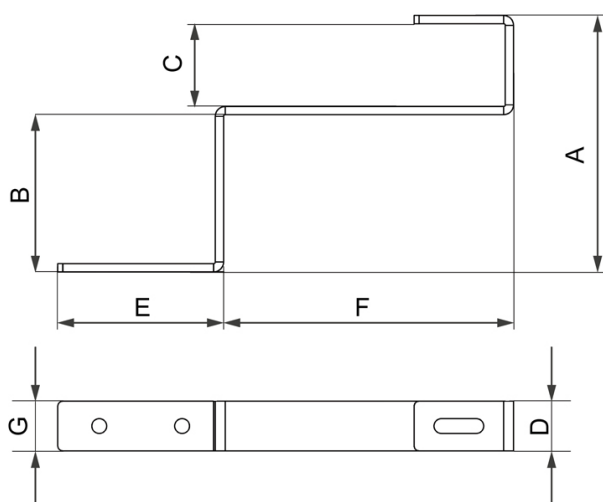


FULL SIZED:

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]
FVD300003	155	100	60	30	100	180	30
FVD300003BOX	155	100	60	30	100	180	30

APPLICATION:

Fixing of photovoltaic systems on roofing tiles supported by strips of varying thickness.

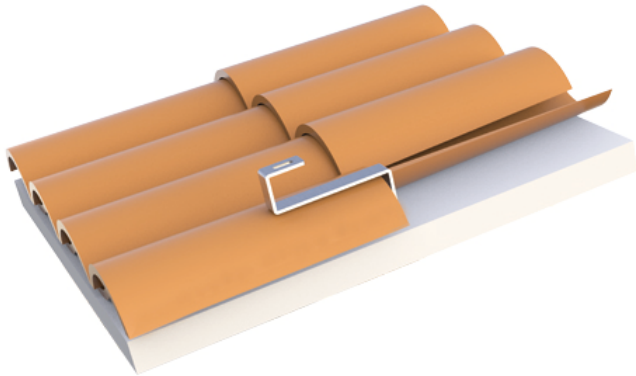

ITEMS

CODE	DESCRIPTION
FVD300003	HSTCFX FIX SUPPORT FOR TILE ROOFS
FVD300003BOX	HSTCFX FIX SUPPORT FOR TILE ROOFS - BOX 10 pcs

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.

Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.