


# DE.CS25

dehumidifier for ductable ceiling

- cod. 30200010

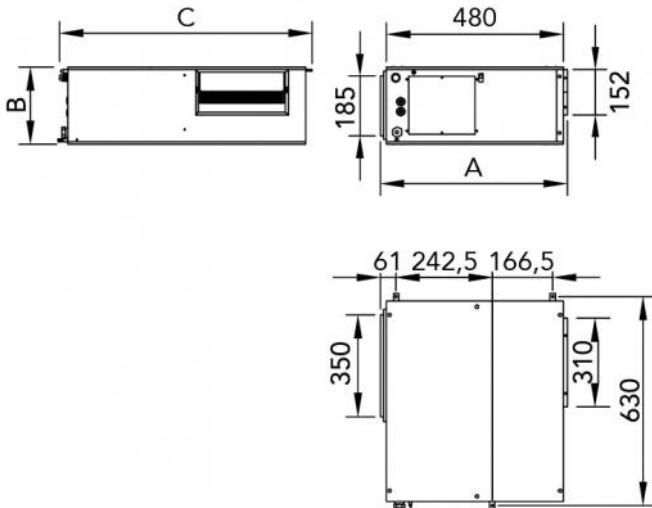

## DIMENSIONS

CODE	HEIGHT A [mm]	WIDTH B [mm]	DEPTH C [mm]
30200010	249	525	650

## TECHNICAL DATA

SPECIFICATIONS	DATA
CONDENSING HUMIDITY (26° - 65%) [l/day]	24
Power consumption [W]	290
Power supply [V]	230
Power supply [Ph]	1
Power supply [Hz]	50
Max power absorbed [W]	340
Water flow rate (15°C) [l/h]	240
CHILLER POWER CONSUMPTION [W]	830
Load loss [kPa]	5
Air flow rate [m³/h]	250
Max. head (VEL.3) [Pa]	60
Mean head (VEL.2) [Pa]	40
Low head (VEL.1) [Pa]	10
Refrigerant (R290) [gr]	70
SOUND POWER LEVEL [dB(A)]	41
Sound pressure level [dB(A)]	33

## ITEMS

CODE	DESCRIPTION
30200010	FALSE-CEILING-DUCTED DEHUMIDIFIER UNIT "DE.CS25"

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.  
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.