

# EF 30 - 40 lt

## EF 7 - 11 - 15 - 20 L mini pump

- cod. 12170039 - cod. 12170095 - cod. 12170040  
- cod. 12170096



**EasyFlow**  


## TECHNICAL SPECIFICATIONS:


- Max flow rate hourly 30- 40 lt/h
- Power supply 230V - 50Hz
- Alarm contact C-NO/NC 8A
- Power consumption 27 W
- Protection rating IP20
- Max noise level 50 - 51 dB[A]
- For air conditioners up to 40 kW
- Max. delivery 14 m for EF 30; 18 m for EF40
- Intake max 2 m vertical between floating body and pump
- Cover with sealing gasket and vent hole
- Tube size 4 x 9.5 mm.
- Pump dimensions W 108 x H 63 x D 38 mm
- Float body dimensions L 91 - H 39 - D 34 mm

## PACK COMPLETE WITH

- 1 pump body
- 1 floating body
- 2 double-sided adhesives for anchor plates
- 2 plates for pump / floating body anchoring
- 1 connection hose 1 m- Ø 6x9.5 mm

- 1 vent tube Ø 4x6 mm
- 1 connecting sleeve in rubber
- 1 removable wiring harness connector
- 1 sheet of instructions


## EF 30 It

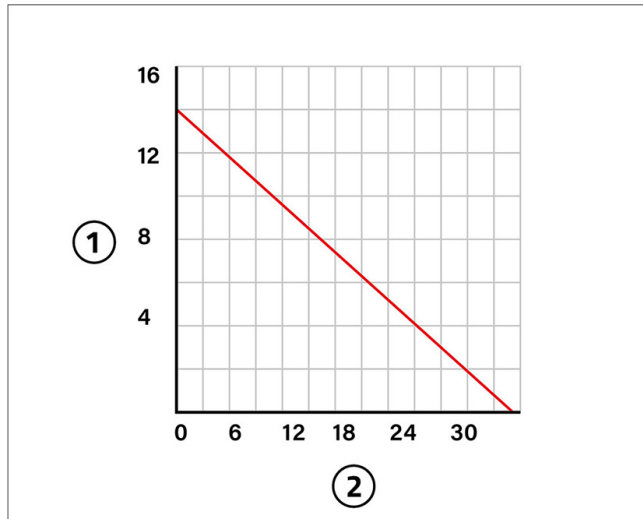

[1] Air delivery (vertical m)  
[2] Flow rate (litres/hour)

- For air conditioners up to 30 kW
- Max. 14 m vertical delivery
- Power consumption 27 W
- Max noise level 50 [dB(A)]

## EF 40 It

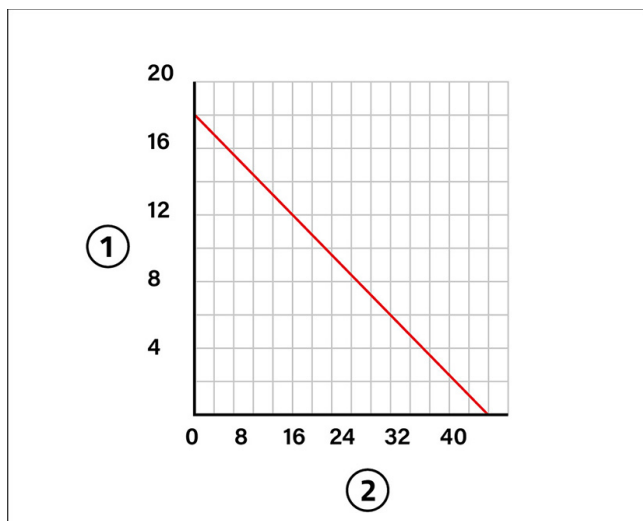

[1] Air delivery (vertical m)  
[2] Flow rate (litres/hour)

- For air conditioners up to 40 kW
- Max. 18 m vertical delivery
- Power consumption 27 W
- Max noise level 51 [dB(A)]

## WALL-MOUNTED APPLICATIONS

- wall splits
- consoles
- fan coils

## CEILING-MOUNTED APPLICATIONS

- ceiling-mounted air conditioners
- ducted

## ITEMS

CODE	DESCRIPTION
12170039	EASY FLOW 30 LT. MINI PUMP "EF30"
12170095	EASY FLOW 30 LT. MINI PUMP WITH VERTICAL CONNECTION EFV-30
12170040	EASY FLOW 40 LT. MINI PUMP "EF40"
12170096	EASY FLOW 40 LT. MINI PUMP WITH VERTICAL CONNECTION EFV40

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.  
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.

