

SBR EXTREME 100-20


vulcanised rubber vibration-resistant floor base

- cod. 11105060V - cod. SCD500241 - cod. SCD500242
- cod. 11105066V - cod. 11105068V



TECHNICAL SPECIFICATIONS:

- Floor bases in SBR vulcanised rubber
- "U" shaped aluminium profile is sunk for better sealing
- Built-in spirit level
- Fastening with threaded plate, washer and M8 bolt supplied
- Slots ready for drilling holes for fastening to the floor
- Non-slip, water-draining resting base in armed body
- Ideal for the fastening of outdoor condensing units, VRV-VRF, base-mounted boilers, electrical or tube channels

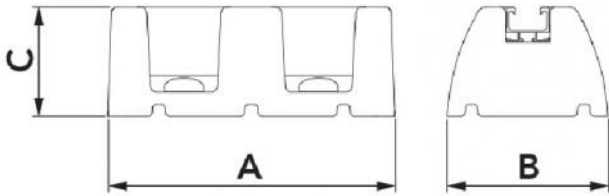

DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]
11105060V	250	140	95
SCD500241	450	140	95
SCD500242	600	140	95
11105066V	1000	140	95
11105068V	1200	140	95

TECHNICAL DATA

CODE	LOAD CAPACITY [kg]
11105060V	200
SCD500241	300
SCD500242	500
11105066V	650
11105068V	750

ITEMS

CODE	DESCRIPTION
11105060V	SBR "EXTREME-20" 250 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
SCD500241	SBR "EXTREME-20" 450 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
SCD500242	SBR "EXTREME-20" 600 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
11105066V	SBR "EXTREME-20" 1000 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
11105068V	SBR "EXTREME-20" 1200 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.