


Insulated reduction for 3-way insulated shunts

- cod. PWC500013 - cod. PWC500014 - cod. PWC500015
- cod. PWC500016



TECHNICAL SPECIFICATIONS:

- Made of n PP
- Insulating coating: polyethylene with aluminium coating
- Operating temperature: 0°C to +70°C
- Only in combination with 3-way insulated shunts
- For flexible heating and air conditioning pipes (insulated or not)

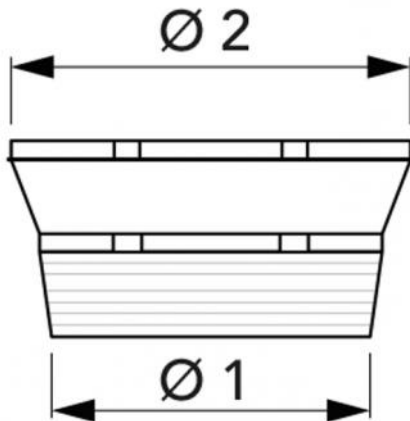

DIMENSIONS

| CODE | PIPE COUPLER Ø 1 [mm] | SHUNT COUPLER Ø 2 [mm] |
|-----------|-----------------------|------------------------|
| PWC500013 | 150 | 200 |
| PWC500014 | 200 | 250 |
| PWC500015 | 250 | 300 |
| PWC500016 | 300 | 350 |

ITEMS

| CODE | DESCRIPTION |
|-----------|--|
| PWC500013 | INSULATED ADAPTER FOR 3-WAY INSUALTED BRANCHES FROM Ø 200 mm TO Ø 150 mm |
| PWC500014 | INSULATED ADAPTER FOR 3-WAY INSUALTED BRANCHES FROM Ø 250 mm TO Ø 200 mm |
| PWC500015 | INSULATED ADAPTER FOR 3-WAY INSUALTED BRANCHES FROM Ø 300 mm TO Ø 250 mm |
| PWC500016 | INSULATED ADAPTER FOR 3-WAY INSUALTED BRANCHES FROM Ø 350 mm TO Ø 300 mm |

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.