

DISCOVERY 3X

Wall-mounted, backlit programmable thermostat touch, battery-run, radio frequency

- cod. GAD100005




TECHNICAL SPECIFICATIONS:

- Power supply battery 4 x 1.5 V type AAA (LR03) supplied
- Battery life 18/24 months (normal use)
- 868 Mhz RF data transmission
- RF signal range 50 m maximum in open field between chronothermostat and "Polaris" control unit
- 4.5" backlit LCD display

FUNCTIONS

- Touch keypad
- Features: chronological or manual
- Automatic or manual adjustment of damper and grille
- Timed thermostat lock
- Temperature scale °C / °F
- RH display in %
- Humidity control in radiant cooling mode with relay module
- Ready for window contact
- AT and set point value
- Clock (AM - PM / 24h)
- Daily and weekly function
- Wall fastening using template, screws and fixing plugs supplied

DIMENSIONS

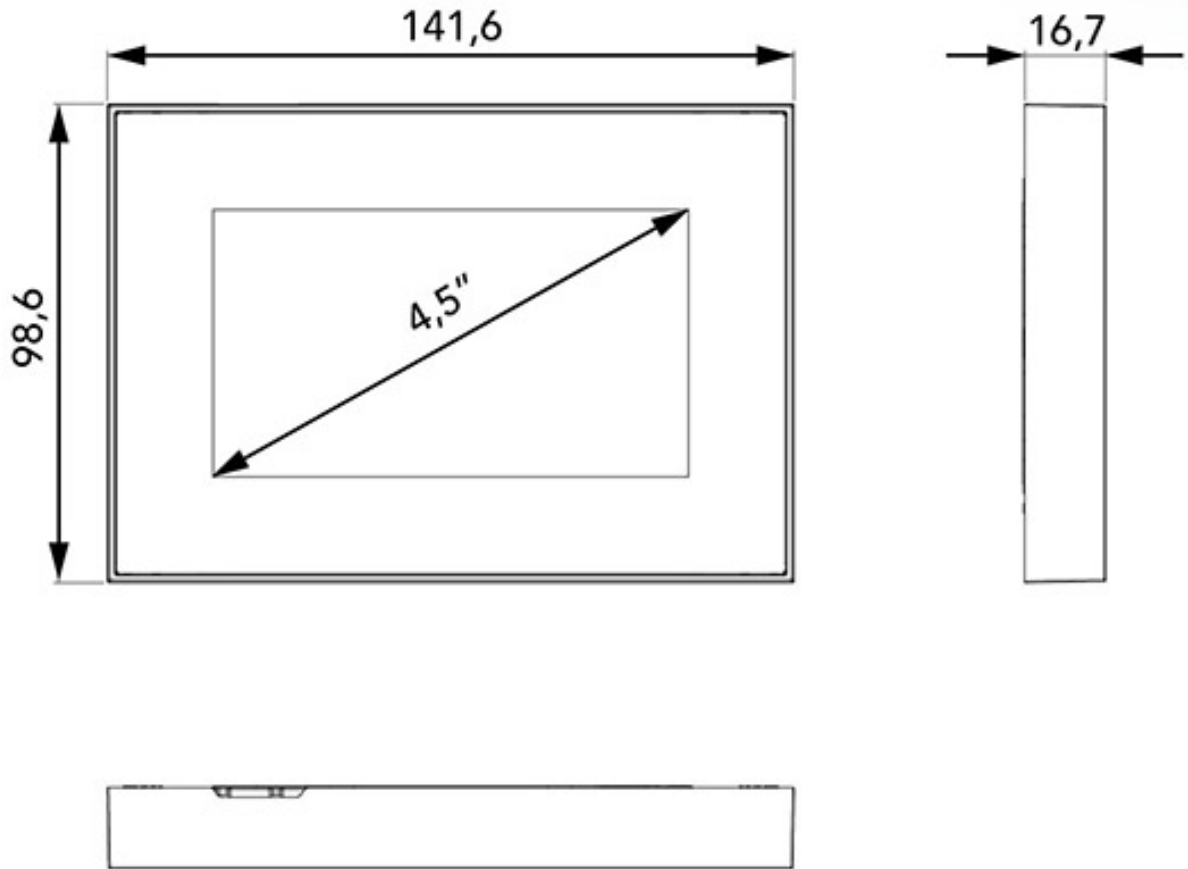

ITEMS

CODE	DESCRIPTION
GAD100005	

All rights relating to this publication are the exclusive property of Tecnosystemi SpA. Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.