


"Y" shunt in PAL

- cod. PWD600018 - cod. PWD600019 - cod. PWD600020



TECHNICAL SPECIFICATIONS PAL:

- Coated on both sides with embossed aluminium with thickness: 80 μm
- Aluminium flange supplied
- Material thickness 20 mm
- Density: 49 kg/m^3
- Reaction to fire class: B-s3,d0
- Temperature: -30°C to $+80^{\circ}\text{C}$

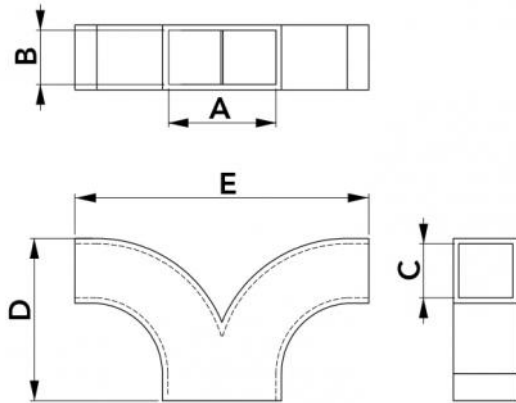

DIMENSIONS

| CODE | A [mm] | B [mm] | C [mm] | D [mm] | E [mm] |
|-----------|--------|--------|--------|--------|--------|
| PWD600018 | 350 | 200 | 200 | 600 | 1000 |
| PWD600019 | 400 | 200 | 200 | 600 | 1100 |
| PWD600020 | 600 | 300 | 300 | 900 | 1300 |

ITEMS

| CODE | DESCRIPTION |
|-----------|-------------------------------------|
| PWD600018 | "Y" BRANCH IN PAL 350x200 A 200x200 |
| PWD600019 | "Y" BRANCH IN PAL 400x200 A 200x200 |
| PWD600020 | "Y" BRANCH IN PAL 600x300 A 550x300 |

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.