

Pipe in EPS for MVHR Ø125 and Ø160 L 1000 mm

- cod. ACC600035 - cod. ACC600036




TECHNICAL SPECIFICATIONS MOD. Ø 125

- Grey colour EPS insulated pipe
- Wall thickness: 15.5mm
- Weight: 0,41 kg
- Dimensions: 156 x 156 x 1002 mm
- internal Ø: 125
- Temperature range -25 / +80 (C°)
- Maximum air flow: 275 m³/h
- Thermal resistance: 0.032 m²K/W

TECHNICAL SPECIFICATIONS MOD. Ø 160

- Grey colour EPS insulated pipe
- Wall thickness: 15.5mm
- Weight: 0,45 kg
- Dimensions: 191 x 191 x 1002 mm
- internal Ø: 160
- Temperature range -25 / +80 (C°)
- Maximum air flow: 425 m³/h
- Thermal resistance: 0.032 m²K/W

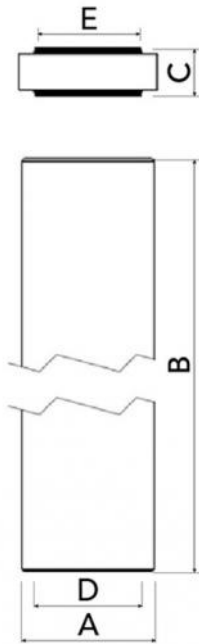

DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
ACC600035	156	1002	56	125	119
ACC600036	191	1002	56	160	154

ITEMS

CODE	DESCRIPTION
ACC600035	PIPE IN EPS FOR MVHR Ø 125mm L. 1000mm
ACC600036	PIPE IN EPS FOR MVHR Ø 160mm L. 1000mm

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.