


Condensate drain pan with antifreeze cable

- cod. SCD300065 - cod. SCD300070 - cod. SCD500312



TECHNICAL SPECIFICATIONS:

- Electrogalvanised sheet
- External polyester painting RAL 9002
- Power 15 W/m
- Coupling for condensate drain pipe \varnothing 16 mm
- Power supply voltage 230 V
- Cable diameter 6 mm
- Resistance tolerance from -5% to +10%
- Built-in thermostat
- Connection at +3°C and disconnection at 12°C

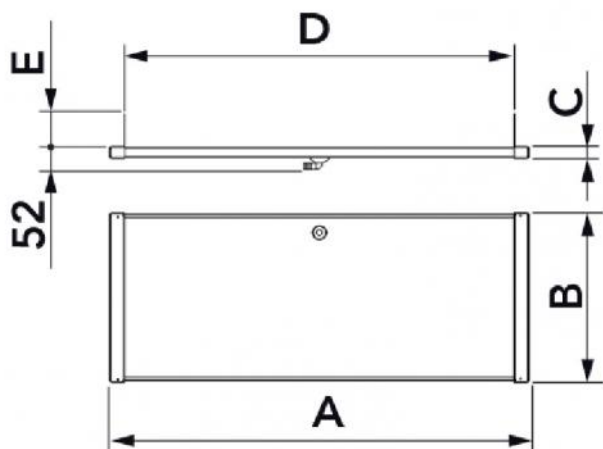

DIMENSIONS

| CODE | A [mm] | B [mm] | C [mm] | D [mm] | E [mm] |
|-----------|--------|--------|--------|-----------|--------|
| SCD300065 | 980 | 390 | 35 | 910 max. | 80 |
| SCD300070 | 1100 | 550 | 35 | 1030 max. | 130 |
| SCD500312 | 1400 | 550 | 35 | 1330 max. | 130 |

ITEMS

| CODE | DESCRIPTION |
|-----------|---|
| SCD300065 | LARGE CONDENSATE TRAY WITH FROST-PROTECTION SHORT CABLE WITH THERMOSTAT |
| SCD300070 | MAXI CONDENSATE TRAY WITH FROST-PROTECTION SHORT CABLE WITH THERMOSTAT |
| SCD500312 | BIG CONDENSATE TRAY WITH FROST-PROTECTION SHORT CABLE WITH THERMOSTAT |

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
 Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.